



# PRODUCT CATALOG

**Cables & Adapters**

[www.farsince.com](http://www.farsince.com)

# Table of Contents



»»» Company Overview	Page 01
»»» Vietnam Manufacture	Page 02
»»» USB Cable & Adapter	Page 03-15
»»» HDMI Cable & Adapter	Page 16-20
»»» DisplayPort Cable & Adapter	Page 21-24
»»» DVI, VGA Cable & Adapter	Page 25
»»» Network Cable & Adapter	Page 26-30
»»» Power Cable & Adapter	Page 31-38
»»» Audio Cable & Adapter	Page 39-41
»»» Panel Mount Cable & Adapter	Page 42-51
»»» AOC Cable	Page 52
»»» Computer Cable	Page 53-55
»»» High Speed Cable	Page 56-57
»»» Bulk Cable	Page 58-64
»»» Packaging & FAQs	Page 65-66



RoHS

HDMI®  
HIGH-DEFINITION MULTIMEDIA INTERFACE



## Farsince Electronic, Reliable Connectivity Solutions Provider Since 2009

As an ISO-certified manufacturer with strategic facilities in China and Vietnam, we deliver premium cables & adapters meeting strict EU & NA compliance standards (UL/CE/RoHS/REACH/CPR).

Our automated production lines and advanced testing technologies (Fluke/TDR) ensure 99.8% defect-free products. Over 500 global clients trust our:

- ✓ Custom OEM/ODM capabilities
- ✓ Bilingual 24/7 project support
- ✓ Sustainable Rohs, REACH-compliant materials
- ✓ Resilient dual-country supply chain

Committed to client-centric partnerships, we optimize solutions through continuous R&D and cultural-aligned services. Explore our facilities in Ningbo or Vietnam to experience quality-driven manufacturing.

## CERTIFICATES



CPR Bca, Eca

UL

ETL

CE

DELTA

ISO9001

## TESTING EQUIPMENTS



TDR &amp; Network Analyzer


Electric Tester

Salt spray test chamber

Plug bending tester



In order to cope with the procurement changes and challenges in the global market, we have established a very stable, competitive and large-scale production base in Vietnam, where we can produce most of the products that can be produced in China. If you have a demand for procurement from Vietnam, we will be a very suitable choice for you

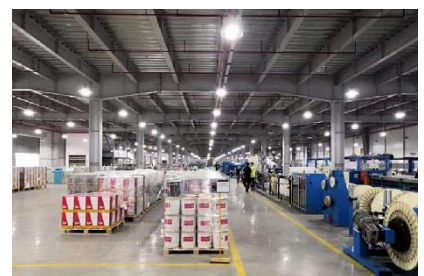



## Thunderbolt 5 M/M 120G Cable

- Model No.: FS16402
- Up to 80Gb/s of bi-Directional Data Speed
- Up to 120Gb/s Display Bandwidth
- Up to 48V 5A 240W
- Support 3\*8K Resolution, PCI-E protocol
- Length: 0.6m, 1m, 1.5m,



## Thunderbot 4 Cable

- Model No.: FS16401
- Coaxial Cable, TPE jacket
- 40Gbps, 20V 5A 100W
- Support 8K Resolution, PCI-E protocol
- Length: 0.5m, 0.8m, 1m, 1.5m, 2m,



## Braided USB 4 M/M PD3.1 Cable

- Model No.: FS16412-40G/80G
- Braided Cable, aluminum Shell
- 40/80Gbps, 48V 5A 240W
- Support 8K Resolution
- Length: 0.5m, 0.8m, 1m, 1.5m, 2m



## Thunderbolt 3 Cable

- Model No.: FS16400
- Coaxial Cable, TPE jacket
- 40Gbps, 20V 5A 100W
- Support 5K Resolution, PCI-E protocol
- Length: 0.5m, 0.8m, 1m, 2m,



## Angle Braided USB 4 M/M PD3.1 Cable

- Model No.: FS16413
- Braided Cable, aluminum Shell
- 40/80Gbps, 48V 5A 240W
- Support 8K Resolution
- Length: 0.5m, 0.8m, 1m, 1.2m 1.5m, 2m



## USB4 M/M PD3.1 Cable

- Model No.: FS16410
- PVC jacket, Injection mold
- 40/80Gbps, 48V 5A 240W
- Support 8K Resolution
- Length: 0.5m, 0.8m, 1m, 1.2m 1.5m, 2m



## Braided USB4 Extension Cable

- Model No.: FS16270
- Braided Cable, aluminum Shell
- 40/80Gbps, 20V 5A 100W
- Support 8K Resolution
- Length: 0.3m 0.5m 0.8m



## Flat USB4 Flat Short FPC Cable

- Model No.: FS16414
- Aluminum Shell, Flat and Slim
- 40/80Gbps, 48V 5A 240W
- Support 8K Resolution
- Length: 0.13m



## Braided Angle USB4 Extension Cable

- Model No.: FS16271
- Braided Cable, aluminum Shell
- 40/80Gbps, 20V 5A 100W
- Support 8K Resolution
- Length: 0.3m



## Flat USB4 Flat Short FPC Extension Cable

- Model No.: FS16272
- Aluminum Shell, Flat and Slim
- 40/80Gbps, 20V 5A 100W
- Support 8K Resolution
- Length: 0.13m



## Braided USB C Cable, Aluminum Shell

- FS16651B: USB 3.2 Gen2 20/10 Gbps
- FS16609B: USB 3.1 Gen 1 5Gbps
- FS16011B: USB 2.0 480Mbps
- Braided cable, Aluminum Shell
- Up to 20Gbps, 240W, 4K@60Hz
- Length: 0.5m, 1m, 1.5m, 2m, 3m



## Standard USB C Cable, Plastic mold

- FS16651A: USB 3.2 Gen2 20/10 Gbps
- FS16609A: USB 3.1 Gen 1 5Gbps
- FS16011A: USB 2.0 480Mbps
- PVC Cable, Injection mold
- Up to 20Gbps, 240W, 4K@60Hz
- Length: 0.5m, 1m, 1.5m, 2m, 3m



## Braided USB C Cable, Angle Type

- FS16652B: USB 3.2 Gen2 20/10 Gbps
- FS16610B: USB 3.1 Gen 1 5Gbps
- FS16012B: USB 2.0 480Mbps
- Braided cable, Aluminum Shell
- Left, Right Angle type
- Up to 20Gbps, 240W, 4K@60Hz
- Length: 0.5m, 1m, 1.5m, 2m, 3m



## USB 3.2 Gen2 Cable, Plastic mold, Angle

- FS16652A: USB 3.2 Gen2 20/10 Gbps
- FS16610A: USB 3.1 Gen 1 5Gbps
- FS16012A: USB 2.0 480Mbps
- PVC Cable, Injection mold
- Left, Right / Up, Down Angle type
- Up to 20Gbps, 240W, 4K@60Hz
- Length: 0.5m, 1m, 1.5m, 2m,



## Braided USB C Extension Cable, Aluminum Shell

- FS16654B: USB 3.2 Gen2 20/10 Gbps
- Braided cable, Aluminum Shell
- Up to 20Gbps, 240W, 4K@60Hz
- Length: 0.3m 0.5m 1m



## USB C Extension Cable

- FS16654A: USB 3.2 Gen2 20/10 Gbps
- FS16613A: USB 3.1 Gen 1 5Gbps
- FS16026A: USB 2.0 480Mbps
- PVC Cable, Injection mold
- Up to 20Gbps, 240W, 4K@60Hz
- Length: 0.3m 0.5m 1m



## Angle USB C Extension Cable

- Model No.: FS16655A
- USB 3.2 Gen2 20/10 Gbps
- PVC Cable, Injection mold
- Left, Right / Up, Down Angle type
- Up to 20Gbps, 240W, 4K@60Hz
- Length: 0.3m 0.5m 1m




## 180° Angle USB C Extension Cable

- Model No.: FS16656
- USB 3.2 Gen2 20/10 Gbps
- PVC Cable, Injection mold
- 180° Angle type
- Up to 20Gbps, 240W, 4K@60Hz
- Length: 0.3m 0.5m 1m



## USB AM-CM Cable

- Model No.: FS16606A
- Data support Up to 10Gbps
- Support up to 20v 3a 60w charging
- Length: 0.3m, 0.5m, 1m, 1.5m, 2m, 3m



## USB C-C Cable with AM/CF Adapter


- Model No.: FS16608
- C-C support 20Gbps 4K@60hz video
- AM/CF adapter support 10Gbps
- Length: 0.3m, 0.6m, 1m, 1.5m





## USB 3.0 AM-CM Angle VR Cable

- Model No.: FS16607A
- Flexible cable
- Connects your VR devices to a gaming PC
- Compatible with Meta Quest 3S/Quest3/Quest2/Pro/Pico 4
- Length: 0.5m, 1m, 1.5m, 2m, 3m, 5m, 6m



## USB 3.0 CM-CM Angle VR Cable

- Model No.: FS16610A
- Flexible cable
- Connects your VR devices to a gaming PC
- Compatible with Meta Quest 3S/Quest3/Quest2/Pro/Pico 4
- Length: 0.5m, 1m, 1.5m, 2m, 3m, 5m, 6m



## USB 3.0 CM -BM Printing Cable

- Model No.: FS16611A
- PVC Cable, Injection mold
- Support 5Gbps
- Length: 0.5m, 1m



## USB 3.0 CM -Micro USB Cable

- Model No.: FS16612A
- PVC Cable, Injection mold
- Support 5Gbps
- Length: 0.5m, 1m



## USB 2.0 CM -BM Printing Cable

- Model No.: FS16023A
- PVC Cable, Injection mold
- Support 480Mbps
- Length: 1m



## USB 2.0 CM -Mirco USB Cable

- Model No.: FS16025A
- PVC Cable, Injection mold
- Support 480Mbps
- Length: 1m



## USB 2.0 CM -Mini USB Cable

- Model No.: FS16024A
- PVC Cable, Injection mold
- Support 480Mbps
- Length: 1m



## USB 3.0 Active Extension cable with booster

- Model No.: FS16614
- Aluminum Shell, with power port
- Support 5Gbps
- 5m: 1 chip
- 10m, 15m: 2 chips
- 20m: 3 chips /25m, 30m: 4 chips



## USB 3.0 AF-CM OTG Cable

- Model No.: FS16615A
- PVC Cable, Injection mold
- Support up to 10Gbps
- Length: 0.3m
- 10Gbps requires 2-end device support



## USB 3.0 AM-CF OTG Cable

- FS16616A: Single side support 10G
- FS16616B: Double side support 10G
- PVC Cable, Injection mold
- Support up to 10Gbps
- Length: 0.3m
- 10Gbps requires 2-end device support



## USB 3.0 AM-AM Cable

- Model No.: FS16601A
- USB 3.0 A Male/ A Male
- Support 5Gbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 3.0 Extension Cable

- Model No.: FS16602A
- USB 3.0 A Male/ A Female
- Support 5Gbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 3.0 Active Extension Cable

- Model No.: FS16603A
- USB 3.0 A Male/ A Female
- Support 5Gbps
- With Active Chipset
- Length: 5m, 10m, 15m, 20m, 25m, 30m



## Angle USB 3.0 Extension Cable

- Model No.: FS16602C
- USB 3.0 A Male/ A Female
- Left, Right, Up, Down angle available
- Support 5Gbps
- Length: 0.3m, 1m, 1.5m



## USB 3.0 AM-BM Printing Cable

- Model No.: FS16604A
- USB 3.0 A Male/ B Male
- Support 5Gbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 3.0 AM-Micro USB Cable

- Model No.: FS16605A
- USB 3.0 A Male/ Micro Male
- Support 5Gbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 3.1 Type-E Male to USB 19/20 Pin Header

- Model No.: FS16629
- TYPE E male/ 19/20 Pin male
- Support 5Gbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 3.0 19/20 Pin header motherboard cable

- FS16620: 20PIN M/M
- FS16621: 20PIN M/F
- FS16622: 20PIN F/F
- Support 5Gbps
- Length: 0.3M



## USB 3.0 19/20 pin splitter cable

- FS16623A: Male to Female
- FS16623B: Male to dual female splitter
- Support 5Gbps
- Flat and flexible ribbon cable
- Length: 0.3m



## 2 USB 3.0 Female to Motherboard 20pin Header Cable

- FS16624: 20P M- 2X AM
- FS16625: 20P F- 2X AM
- FS16626: 20P F- 2X AF
- Support 5Gbps
- Length: 0.3m





## USB 2.0 AM/AM Cable

- Model No.: FS16501
- USB 2.0 A Male/ A Male
- Support 480Mbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 2.0 AM/AF Extension Cable

- Model No.: FS16502A
- USB 2.0 A Male/ A Female
- Support 480Mbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 2.0 AM/BM Printing Cable

- Model No.: FS16504A
- USB 2.0 A Male/ B Male
- Support 480Mbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 2.0 AM/Mini USB Cable

- Model No.: FS16505A
- USB 2.0 A Male/ Mini 5P Male
- Support 480Mbps
- Length: 0.3m, 1m, 1.8m 3m



## USB 2.0 AM/Micro USB Cable

- Model No.: FS16506A
- USB 2.0 A Male/ Micro 5P Male
- Support 480Mbps
- Length: 0.3m, 1m, 1.8m 3m



## Active USB 2.0 Extension Cable

- Model No.: FS16503
- USB 2.0 A Male/ A Female
- Support 480Mbps
- With Active Chipset
- Length: 5m, 10m, 15m, 20m, 30m




## Braided USB 2.0 AM/USB-C Cable

- Model No.: FS16509B
- Braiding cable, Aluminum sheel,
- Support 480Mbps,
- Support Huawei, OPPO, Xiaomi fast charging protocol, Samsung 9v, iphon 7.5w charging
- Length: 1m, 1.5m, 2m



## 6A/100W 3 in 1 Full protocol fast charging cable

- Model No.: FS16016
- USB 2.0 A Male/ CM+Lightning+Micro
- Supports Huawei 18W, 22.5W, 40W, 66W, 100W; OnePlus, OPPO, and Realme 20W, 50W, 80W; Samsung, Xiaomi, VIVO 9V 2A/9V 3A
- Length: 1.25m



## 60W braided USB C-C Cable

- Model No.: FS16011C
- Braiding cable, ABS sheel,
- Support 480Mbps, max 60w
- Support PD, PPS, QC protocol
- Length: 1m, 1.5m, 2m



## 27W braided USB C to Lightning Cable

- Model No.: FS16014
- Braiding cable, ABS sheel,
- Support 480Mbps, max 27w
- Support PD, PPS, QC protocol
- Length: 1m, 1.5m, 2m



## USB 3.0 to HDMI Adapter

- Model No.: FS16621
- USB 3.0 A Male/ HDMI Female
- Support up to 1080P
- System: Windows XP/7/8/10, OS X10.6 and above
- FL2000 chipset, no drive required
- Length: 0.2m



## USB 3.0 to VGA Adapter

- Model No.: FS16622
- USB 3.0 A Male/ VGA Female
- Support up to 1080P
- System: Windows7/8/10
- FL2000 chipset, no drive required
- Length: 0.2m



## USB 3.0 to HDMI VGA 2 IN 1 Adapter

- Model No.: FS16623
- System: Windows XP/Vista/7/8/10, OS X10.6-10.8
- Length: 0.2m
- Support up to 1080P
- FL2000 chipset, no drive required



## USB 3.0 to Dual HDMI Adapter

- Model No.: FS16624
- Plug and play
- Support up to 1080P
- Support SST, MST
- System: Windows 10/8.1/8.1/7/XP/MAC OS
- Length: 0.2m



## USB 3.0 to SATA 22P Adapter

- Model No.: FS16625
- USB 3.0 A Male/ SATA Male
- Support up to 6Gbps, OTG
- System: Windows XP/Vista/7/8/10/Mac
- Length: 0.2m
- PS: Only support 2.5" SATA SSD hard drive, Do not Support 3.5" HDD and CD-ROM



## USB 3.0 to IDE and SATA Converter

- Model No.: FS16626
- USB 3.0 A Male/ SATA Male
- Support up to 6Gbps, OTG
- System: Windows XP/Vista/7/8/10/Mac
- Length: 0.2m
- Support both 2.5" and 3.5" SSD HDD
- Support DC 12V power input



## 3 Ports USB 3.0 Hub with Gigabit Ethernet

- Model No.: FS16629
- 3 USB 3.0 Support 5Gbps
- Ethernet Support Gigabit
- Aluminum Shell
- Length:0.15m



## USB 3.0 to Ethernet Adapter, Gigabit/2.5G

- FS16628A: Gigabit
- FS16628B: 2.5G
- USB 3.0 A Male/ RJ45 female
- 1000M Gigabit LAN
- Aluminum Shell
- Length:0.15m



## USB 3.0 4 ports HUB

- Model No.: FS16630
- USB A Male/ Female\*4
- Support up to 5Gbps
- System: Windows XP/Vista/7/8/10/Mac
- Length: 0.3m
- More color options
- A: 4\*USB3.0. B: USB3.0+3USB2.0. C: 4\*usb2.0



## USB 3.0 4/7 ports HUB

- FS16637-4: 4 Ports
- FS16637-7: 7 Ports
- All port support up to 5Gbps
- With independent switch
- With 5V power supply
- System: Windows XP/Vista/7/8/10/Mac
- Length: 0.3m
- Length:0.15m





## USB 2.0 to RS232 male Adapter

- Model No.: FS16230
- USB A male to RS232 male
- With driver
- Chip Options: A: PL2303 B: FTDI FT232



## USB 2.0 to RS232 female adapter

- Model No.: FS16231
- USB A male to RS232 female
- With drivers
- Chip Options: A: PL2303 B: FTDI FT232



## USB 2.0 to RS232 male Cable

- Model No.: FS16232
- USB A male to RS232 male
- With driver
- Length: 1.5M
- Chip Options: A: PL2303 B: FTDI FT232



## USB 2.0 to RS232 female Cable

- Model No.: FS16233
- USB A male to RS232 female
- With driver
- Length: 1.5M
- Chip Options: A: PL2303 B: FTDI FT232



## USB TO RS485/RS422 Cable

- Model No.: FS16234
- Supports 4 communication modes
- A stable transmission of 1200 meters
- With driver
- Chip: FTDI FT232RL+ZT485
- Length: 1.5M



## USB BF TO DB9 RS232 adapter with cable

- Model No.: FS16235
- Chip: PL2303GT
- System: Windows XP/Vista/7/8/10/Mac
- With driver
- With 1.2m USB AM-BM Cable



## USB to DB25 Adapter

- Model No.: FS16236
- USB 2.0 A Male/ DB25 female
- Chip: PL2305
- System: Windows XP/Vista/7/8/10/Mac
- Length: 1.5m



## USB to CN36 Adapter

- Model No.: FS16237
- USB 2.0 A Male/ CN36 Male
- Chip: PL2305
- System: Windows XP/Vista/7/8/10/Mac
- Length: 1.5m



FS16270  
3.0 A/F-A/F



FS16271A  
3.0 A/M-A/F



FS16272 Left/Right  
3.0 A/M-A/F



FS16273 Up/Down  
3.0 A/M-A/F



FS16275  
3.0 B/M-A/F



FS16276  
3.0 Micro/M-A/F



FS16277 Angle  
3.0 20P M/F



FS16278  
3.0 20P/F/ Dual A/F

## 4K USB-C to HDMI Cable

- Model No.: FS16501A
- USB-C Male/ HDMI Male
- Gold Plated connector
- Length: 1M, 1.8M, 3M
- Options: **A1:** 4K@30Hz, **A2:** 4K@60Hz



## Braided 8K USB-C to HDMI Cable

- Model No.: FS16501B
- USB-C Male/ HDMI Male
- Aluminum Casing
- Length: 1M, 1.8M, 3M
- Options: **B1:** 4K@60Hz, **B2:** 8K@60Hz



## USB-C to DisplayPort Cable

- Model No.: FS16504A
- USB-C Male/ DP Male
- Gold Plated connector
- Support UP to 4K@60Hz
- Length: 1M, 1.8M, 3M



## Braided 8K USB-C to DisplayPort Cable

- Model No.: FS16504B
- USB-C Male/ DP Male
- Aluminum Casing
- Support UP to 8K@60Hz
- Length: 1M, 1.8M, 3M



## USB-C to DVI-D cable

- Model No.: FS16502
- USB-C Male/ DVI 24+1
- Gold Plated connector
- Length: 1M, 1.8M, 3M



## USB-C to VGA cable

- Model No.: FS16503
- USB-C Male/ VGA HD15 male
- Gold Plated connector
- Length: 1M, 1.8M, 3M



## 4K USB-C to Mini DisplayPort Cable

- Model No.: FS16505A
- USB-C Male/ MDP Male
- Gold Plated connector
- ABS Shell,
- Support 4K@60Hz
- Length: 1M, 1.8M, 3M



## 8K USB-C to Mini DisplayPort Cable

- Model No.: FS16505B
- USB-C Male/ MDP Male
- Gold Plated connector
- Aluminum Shell
- Support 8K@60Hz
- Length: 1M, 1.8M, 3M



## USB-C to DB9 RS232 Cable

- FS16506A: C to RS232 Male
- FS16506B: C to RS232 female
- With drivers
- Length: 1.5M
- Chip Options: **A:** PL2303GT **B:** FTDI FT232



## USB-C to 3.5mm Stereo audio Cable

- Model No.: FS16507
- USB-C Male/ 3.5mm male
- Build in Chipset
- Aluminum shell
- Length: 1M





## USB-C to SATA cable

- FS16607A: For 2.5" Hard drive
- FS16607B: For 2.5"/3.5" Hard drive
- FS16607C: C to IDE and SATA Converter
- USB-C Male/ SATA Male
- Supports SATA 1.5/3/6 Gb/s
- Length: 0.3M



## USB /USB C to RJ45 Ethernet cable

- FS16509: USB CM to RJ45 M
- FS16633: USB AM TO RJ45 M
- Braided Cable
- Support Gigabit Ethernet
- Length: 1M 1.5M 2M 3M 5M



## USB-C to HDMI Female Adapter, Aluminum

- Model No.: FS16601B
- USB-C Male/ HDMI Female
- Support UP to 8K@60Hz
- Braided Cable, Aluminum Cable
- Length: 0.15M
- B1: 4K@30Hz, B2: 4K@60Hz B3:8K@60Hz



## USB-C to DVI Female Adapter, Aluminum

- Model No.: FS16602B
- USB-C Male/ DVI-I Female
- Aluminum Shell
- Support UP to 1080P
- Length: 0.15M



## 8K USB-C to DisplayPort Adapter, Aluminum

- Model No.: FS16604B
- USB-C Male/ DP Female
- Aluminum Shell
- Support UP to 8K@60Hz
- Length: 0.15M



## USB-C to VGA Female Adapter, Aluminum

- Model No.: FS16603B
- USB-C Male/ VGA Female
- Aluminum Shell
- Support UP to 1080P
- Length: 0.15M



## 8K USB-C to Mini DisplayPort Adapter, Aluminum

- Model No.: FS16605B
- USB-C Male/ Mini DP Female
- Aluminum Shell
- Support UP to 4K@60Hz
- Length: 0.15M



## USB-C to RJ45 Ethernet Adapter, Aluminum

- Model No.: FS16606B
- USB-C Male/ RJ45 Female
- Length: 0.15M
- B1: Gigabit B2: 2.5G



## USB-C to 3.5mm Female audio Adapter

- Model No.: FS16608A
- USB-C Male/ 3.5mm Stereo Female
- Aluminum Shell
- Length: 0.15M



## USB-C to 3.5mm, USB-C female audio Adapter

- Model No.: FS16608B
- USB-C Male/ 3.5mm Stereo Female + USB C female for power
- Aluminum Shell
- Length: 0.15M



## USB-C to Dual USB-C female audio Adapter

- Model No.: FS16608C
- USB-C Male/ USB C Female for audio +USB C female for power
- Aluminum Shell
- Length: 0.15M



## USB-C SD 4.0 Card Reader

- Model No.: FS16609
- USB-C Male/ SD+TF card slot
- Support up to 5Gbps
- Length: 0.15M



## USB-C 3 in 1 Card Reader

- Model No.: FS16610
- USB-C Male/ SD+TF card slot
- USB 3.0 female support 5Gbps
- Length: 0.15M



## Dual Connector USB 3.0/USB C 4 in 1 Card Reader

- Model No.: FS16611
- USB 3.0/USB C dual connector
- SD+TF card slot
- Support up to 5Gbps
- Length: 0.15M



## USB-C to HDMI USB PD 3 IN 1 Adapter

- Model No.: FS16621B
- HDMI Support 4K@30Hz
- USB 3.0 Support 5Gbps
- PD Support up to 100W
- Length: 0.15M



## Compact USB-C to HDMI USB PD 3 IN 1 Adapter

- Model No.: FS16621C
- HDMI Support 4K@30Hz
- USB 3.0 Support 5Gbps
- PD Support up to 100W
- Length: 0.15M



## USB-C to 3 Ports USB Hub with PD, Aluminum

- Model No.: FS16624B
- Support 5Gbps
- PD Support up to 87W
- Length: 0.15M
- B1: 3USB 3.0+PD
- B2: USB3.0+2USB2.0+PD



## USB-C to 3 Ports Hub with Ethernet Adapter

- Model No.: FS16625B
- RJ45 Support Gigabit Ethernet
- Length: 0.15M
- B1: 3USB 2.0+100M LAN
- B2: 3USB3.0+ Gigabit LAN



## USB-C to VGA USB PD 3 IN 1 Adapter

- Model No.: FS16622B
- VGA Support 1080P
- USB 3.0 Support 5Gbps
- PD Support up to 100W
- Length: 0.15M



## USB/USB-C to 3 Ports Hub with Ethernet Adapter

- Model No.: FS16625C
- RJ45 Support Gigabit Ethernet
- Length: 0.15M
- C1: 3USB 2.0+100M LAN
- C2: 3USB3.0+ Gigabit LAN



## USB-C to HDMI, VGA, USB3.0 PD 4 IN 1 HUB

- Model No.: FS16626C
- HDMI: 4K@30Hz
- VGA: 1080P
- USB 3.0: 5GbpsSupport
- PD: Up to 100W
- Length: 0.15M



## USB-C to HDMI VGA 2 in 1 Adapter

- Model No.: FS16626B
- HDMI: 4K@30Hz
- VGA: 1080P
- Length: 0.15M



## USB-C to Dual HDMI/DP multi monitor Adapter,

- Model No.: FS16627A
- Support SST/MST
- Up to 4K@60Hz
- Length: 0.15M
- A: Dual HDMI, B: Dual DP,
- C: HDMI+DP



## USB-C to Dual HDMI, USB3.0, PD 4 IN 1 HUB

- Model No.: FS16627B
- Support SST/MST
- HDMI: Up to 4K@60Hz
- USB3.0: 5Gbps; PD: Up to 100W
- Length: 0.15M



## USB-C to HDMI 2USB PD 4 IN 1 HUB

- Model No.: FS16628A
- HDMI 4K@30Hz
- PD up to 60W
- Length: 0.15M
- A1: HDMI+2USB3.0+PD
- A2: HDMI+USB3.0+USB2.0+PD



## USB-C to 4 Ports USB Hub

- Model No.: FS16628C
- Support 5Gbps
- More color options
- Length: 0.15M
- C1: 4USB 3.0
- C2: USB3.0+3USB2.0



## USB-C to HDMI DP VGA USB 4 IN 1 HUB

- Model No.: FS16628E
- HDMI: 4K@30Hz, DP: 4K@60Hz
- VGA: 1080P, USB 3.0: 5Gbps
- Length: 0.15M



## USB-C to HDMI 3USB+PD 5 IN 1 HUB

- Model No.: FS16629C
- HDMI: 4K@30Hz
- PD: Up to 100W
- Length: 0.15M
- C1: HDMI+USB3.0+2USB2.0+PD
- C2: HDMI+3USB3.0+PD



## USB-C to HDMI 2USB 2TYPE C 5 IN 1 HUB

- Model No.: FS16629G
- HDMI: 4K@30Hz
- USB A/C: 5Gbps
- PD: Up to 100W
- Length: 0.15M



## USB-C to HDMI VGA USB PD Audio 5 IN 1 HUB

- Model No.: FS16629E
- HDMI: 4K@30Hz
- VGA: 1080P
- USB3.0: 5Gbps;
- PD: Up to 100W
- Length: 0.15M





## USB-C to HDMI 2USB SD TF PD 6 IN 1 HUB

- Model No.: FS16630B
- HDMI 4K@30Hz
- USB3.0+USB2.0
- PD up to 100W
- Length: 0.15M



## USB-C to HDMI LAN SD TF USB3.0 PD 6 in 1 Hub

- Model No.: FS16630E
- HDMI 4K@30Hz; LAN: Gigabit
- USB3.0: 5Gbps
- PD up to 100W
- Length: 0.15M



## USB C 6 in 1 Docking Station for Steam Deck

- Model No.: FS16630F
- HDMI 4K@60Hz;
- LAN: Gigabit
- 3USB3.0: 5Gbps
- PD up to 100W
- Length: 0.15M



## USB-C to HDMI 3USB SD TF PD 7 IN 1 HUB

- Model No.: FS16631B
- HDMI 4K@30Hz;
- SD/TF: 2.0
- USB3.0x1: 5Gbps
- USB2.0x2: 480Mbps
- PD up to 100W
- Length: 0.15M



## USB-C to HDMI 2USB SD TF PD USB-C 7 IN 1 HUB

- Model No.: FS16631C
- HDMI 4K@30Hz;
- SD/TF: 2.0
- USB3.0/USB-C: 5Gbps
- USB2.0: 480Mbps
- PD up to 100W
- Length: 0.15M



## USB-C to HDMI LAN 2USB SD TP USB C PD 8 IN 1 HUB

- Model No.: FS16632A
- HDMI: 4K@30Hz;
- LAN: 100M
- USB3.0+USB2.0
- USB-C: 5Gbps;
- PD: Up to 100W
- Length: 0.15M



## USB-C to HDMI VGA LAN 3USB SD TF PD Audio 10 in 1

- Model No.: FS16634C
- HDMI 4K@30Hz,
- VGA:1080P
- LAN: Gigabit,
- USB 3.0\*3
- PD: Up to 100W,
- 3.5mm output
- SD/TF: 2.0
- Length: 0.15M



## 12 in 1 Multi-Ports USB-C Hub

- Model No.: FS16636B
- HDMI: 4K@30Hz
- DP: 4K@60Hz
- USB 3.0\*3/USB-C: 5Gbps
- SD/TF: 2.0, VGA: 1080P
- PD: up to 100W,
- 3.5mm output,
- LAN: Gigabit
- Length: 0.15M





FS16650  
2.0 C/M-Micro/F



FS16651  
2.0 C/F-Micro/M



FS16652  
2.0 C/M-Mini5P/F



FS16653  
2.0 C/F-Mini5P/M



FS16654  
2.0 C/F-A/M



FS16655  
2.0 C/F-B/M



FS16662  
3.0 C/F-Micro/M



FS16657 180°  
3.0 C/M-A/F



FS16656  
3.0 C/M-A/F



FS16659 10G  
C/F-A/M



FS16663  
3.2 C/M-C/F



FS16666  
3.2 C/F-C/F

## USB4 Coupler



FS16668  
M-F



FS16669  
M-F Right



FS16668  
M-F Up



FS16668  
M-F side




FS16668  
F-F

**HDMI 2.1v 8K Cable**

- Model No.: FS11012
- 48Gbps, 8K@60Hz, 4K@120Hz
- Support HDCP 2.2
- HDR with increased color spaces
- Length: 0.5m-15m

**HQ HDMI 2.1v 8K Cable**

- Model No.: FS11013
- 48Gbps, 8K@60Hz, 4K@120Hz
- Support HDCP 2.2
- HDR with increased color spaces
- Braided cable, Aluminum Shell
- Length: 0.5m-10m

**HDMI 2.0v Cable Dual Color**

- Model No.: FS11003
- Dual Color nice molding
- 18Gbps, 4K@60Hz,
- Support HDR, HEC, ARC, 3D
- Length: 0.5M-10M

**HDMI 2.0v Cable**

- Model No.: FS11002
- 18Gbps, 4K@60Hz,
- Support HDR, HEC, ARC, 3D
- Length: 0.5M-15M

**HDMI 2.0v Cable Aluminum Housing**

- Model No.: FS11004
- Aluminum Housing
- 18Gbps, 4K@60Hz,
- Support HDR, HEC, ARC, 3D
- Length: 0.5M-15M

**Active HDMI Cable for In-wall installation**

- Model No.: FS11011
- Built-in Signal Booster
- 18Gbps, 4K@60Hz(12-20M), 4K@30Hz (20-50M)
- Support HDR, HEC, ARC, 3D
- Length: 15M-50M

**Angled HDMI Cable**

- Model No.: FS11005
- 4 Directions available
- Up to 4K@60Hz
- Support HDR, HEC, ARC, 3D
- Length: 0.5M-5M

**Locking HDMI 2.0 Cable**

- Model No.: FS11006 A: 4K/B: 8K
- Locking Connector
- 18Gbps, 4K@60Hz,
- Support HDR, HEC, ARC, 3D
- Length: 0.5M-5M

**HDMI M/F Extension Cable**

- Model No.: FS11101 A/B
- Injection molding
- A: 4K@60Hz
- B: 8K@60Hz
- Length: 0.5M-1.5M

**HQ HDMI M/F Extension Cable**

- Model No.: FS11101 A/B
- Braided cable, Aluminum
- A: 4K@60Hz
- B: 8K@60Hz
- Length: 0.5M-1.5M





OD: 3.2mm



FS11008AA: HDMI-HDMI  
 FS11008AC: HDMI-Mini HDMI  
 FS11008AD: HDMI-Micro HDMI

## 36AWG Flexible HDMI Cable

- ◆ Low profile, compact design and Ultra flexible cable construction
- ◆ 36AWG twisted copper, OD: 3.2-4.5mm
- ◆ Left, Right, Up, Down angle types available for type A, C, D plugs
- ◆ Support video resolutions up to 4K@60Hz, 18Gbps
- ◆ Supports HDR, HEC, ARC, 3D video, Deep Color and x.v. Color™
- ◆ Available Length: 0.5m, 1m, 1.5m, 1.8m, 3m, 5m



FS11007AA: HDMI-HDMI  
 FS11007AC: HDMI-Mini HDMI  
 FS11007AD: HDMI-Micro HDMI

## 8K Silicon Ultra Slim HDMI Cable

- ◆ Working temperature: -60° to +200°
- ◆ Teflon core wire, graphene shielding
- ◆ 36AWG tinned copper, OD: 3.8±0.2mm
- ◆ Left, Right, Up, Down angle types available for type A, C, D plugs
- ◆ Support video resolutions up to 8K@60Hz, 48Gbps
- ◆ Supports HDR, HEC, ARC, 3D video, Deep Color and x.v. Color™
- ◆ Available Length: Max 2.5M for 8K@60Hz, Max 3M for 4K@60Hz



FS11009AA: HDMI-HDMI  
 FS11009AC: HDMI-Mini HDMI  
 FS11009AD: HDMI-Micro HDMI

## World's Thinnest and Most Flexible Micro Coaxial HDMI Cable

- ◆ 85% Thinner 5 times More Flexible Than Any Other HDMI Cable
- ◆ New Innovative Micro Coax Cable Technology
- ◆ Thinnest 40AWG OD: 2.5mm
- ◆ Left, Right, Up, Down angle types available for type A, C, D plugs
- ◆ Support video resolutions up to 8K@60Hz, 48Gbps
- ◆ Application: Wearable Devices, AR VR Wearable Glass, UAV Drone
- ◆ Available Length: 8K@60Hz: OD 3.3mm up to 1M, OD: 4.8mm up to 4M; 4K@60Hz: OD 2.5mm up to 1.2M, OD: 3.3mm up to 2M, OD: 4.8mm up to 5M

## Mini HDMI to HDMI Cable

- Model No.: FS11201
- HDMI Type A-Type C
- 18Gbps, 4K@60Hz,
- Support HDR, HEC, ARC, 3D
- Length: 0.5M-3M



## Micro HDMI to HDMI Cable

- Model No.: FS11301
- HDMI Type A-Type D
- 18Gbps, 4K@60Hz,
- Support HDR, HEC, ARC, 3D
- Length: 0.5M-3M



## Mini HDMI to HDMI Female Adapter Cable

- Model No.: FS11204
- HDMI Type AF-Type CM
- 18Gbps, 4K@60Hz,
- Support HDR, HEC, ARC, 3D
- Length: 0.2M



## Micro HDMI to HDMI Female Adapter Cable

- Model No.: FS11304
- HDMI Type AF-Type DM
- 18Gbps, 4K@60Hz,
- Support HDR, HEC, ARC, 3D
- Length: 0.2M



## HDMI to DVI-D cable

- Model No.: FS11501
- HDMI to DVI 24+1
- Bi-Direction Cable
- 1080P@60Hz,
- Length: 0.5M-10M



## HDMI Male to DVI-I Female short Cable

- Model No.: FS11502
- HDMI male to DVI 24+5 female
- Bi-Direction Cable
- 1080P@60Hz,
- Length: 0.3M



## HDMI F to DVI M Short Cable

- Model No.: FS11503
- HDMI female to DVI 24+1 male
- Bi-Direction Cable
- 1080P@60Hz,
- Length: 0.3M



## HDMI to DisplayPort Active Adapter

- Model No.: FS11701
- HDMI Male to DP female+ USB AM
- 4K@60Hz,
- Chip: LT6711A
- Length: 0.3M



## HDMI to DisplayPort Active Cable

- Model No.: FS11701
- HDMI Male to DP male+ USB AM
- 4K@60Hz,
- Chip: LT6711A
- Length: 1M 2M 3M



## HDMI/3RCA AV Cable

- FS11821: HDMI to 3RCA
- FS11822: 3RCA to HDMI
- Build in chipset
- Support 1080P
- Length: 2M



## HDMI to VGA female Adapter

- FS11401: HDMI to VGA
- FS11401A: HDMI to VGA with Audio
- FS11401AP: HDMI to VGA with Audio and Power
- ABS Shell
- Support 1080P
- Length: 0.2m



## VGA male to HDMI female adapter, with audio, power

- Model No.: FS11406
- ABS Shell
- Support 1080P
- Length: Adapter 0.2m,
- Audio/Power cable 0.5m



## HDMI to VGA male adapter cable

- Model No.: FS11404
- HDMI male to VGA male
- Injection model
- Support 1080P
- Length: 1.8M



## Automotive A/V cable, HDMI TYPE E M/M Cable

- Model No.: FS11801
- HDMI E male to E male
- Durable injection mold
- Support 4K@60Hz,
- Length: 0.5M-5M



## HDMI A Male to E Male Cable

- Model No.: FS11804
- HDMI A male to E male
- Durable injection mold
- Support 4K@60Hz,
- Length: 0.5M-5M



## HDMI A Female-E Male Cable

- Model No.: FS11802
- HDMI A female to E male
- Durable injection mold
- Support 4K@60Hz,
- Length: 0.5M-5M



## HDMI A Male to E Female Cable

- Model No.: FS11806
- HDMI A male to E female
- Durable injection mold
- Support 4K@60Hz,
- Length: 0.5M-3M



## HDMI E Male to E Female Cable

- Model No.: FS11805
- HDMI E male to E female
- Durable injection mold
- Support 4K@60Hz,
- Length: 0.5M-3M



## USB3.0/ Type C 2 in 1 Video Capture Card

- Model No.: FS11976
- Input up to 4K@30HZ
- Output up to 4K@30HZ
- Windows, MacOS, and Linux
- Support XSplit, Twitch, Youtube, OBS, Zoom, Potplayer
- No driver or external power supply is required
- Length: 0.2m



## USB Type C/HDMI Capture Card 4K With HDMI Loop-Out

- Model No.: FS11972
- Type C/HDMI Switchable signal input
- Input/Loop-Out up to 4K@30HZ
- PD 100W charging
- Output up to 4K@30HZ
- Windows, MacOS, and Linux
- Support XSplit, Twitch, Youtube, OBS, Zoom, Potplayer
- No driver or external power supply is required
- 3\* 3.5mm port: Audio and Mic input and Audio out,







FS11601  
4K AF-AF



FS11602D  
4K AM-AF



FS11602A  
4K AM-AF R/L Angle



FS11602B  
4K AM-AF U/D Angle



FS11603  
4K AF-CM



FS11604  
4K AF-DM



FS11605  
4K 3 IN 1



FS11607  
HDMI F-DVI 24+1 M



FS11608  
HDMI F-DVI 24+5 F



FS11606  
HDMI AM-DVI 24+5 F



FS11620  
8K AF-AF



FS11623  
8K AM-AF



FS11622  
8K AM-AF L/R Angle



FS11621  
8K AM-AF U/D Angle



FS11624  
8K AF-CM



FS11625  
8K AF-DM



FS11980  
4K Repeater  
Max 35m



FS11981  
8K Repeater  
Max 20M



FS11631  
4K AF-AF Keystone



FS11632  
4K AF-AF Wall plate

## DisplayPort 1.4 8K Cable

- Model No.: FS12003A
- Support Up to 8K@60Hz, 4K@144HZ
- Dynamic HDR and HDCP 2.2
- HBR3 Rated, Supports up to 32.4 Gbps bandwidth
- Length: 0.5M-10M



## DisplayPort 1.2v 4K Cable

- Model No.: FS12001
- DP Male/male
- Up to 4K@60Hz
- Length: 0.5M-20M



## Braided DisplayPort 1.4 8K Cable

- Model No.: FS12004A
- Support Up to 8K@60Hz, 4K@144HZ
- Dynamic HDR and HDCP 2.2
- HBR3 Rated, Supports up to 32.4 Gbps bandwidth
- Length: 0.5M-10M



## Angle DisplayPort Cable

- 4K.: FS12002A
- 8K.: FS12002B
- L: Left, R: Right, U: Up, D: Down
- Support up to 8K@60hz
- Length: 1M-10M



## Mini DisplayPort to DisplayPort 1.4 8K cable

- 4K.: FS12011A
- 8K.: FS12011B
- DP Male / Female
- Support up to 8K@60hz
- Length: 1M-3M



## Angle DisplayPort Extension Cable

- 4K.: FS12012A
- 8K.: FS12012B
- L: Left, R: Right, U: Up, D: Down
- Support up to 8K@60hz
- Length: 1M-3M



## Mini DisplayPort 1.2v 4K Cable

- Model No.: FS12301A
- Mini DP Male/Male
- ABS Shell
- Support 4K@60hz
- Length: 1M, 1.8M, 3M



## Mini DisplayPort 1.4v 8K Cable

- Model No.: FS12301B
- Mini DP male/male
- Aluminum Shell
- Support 8K@60Hz
- Length: 1M, 1.8M, 3M



## DisplayPort to HDMI Male Cable

- Model No.: FS12005A
- DP Male/HDMI Male
- ABS Shell
- Support Up to 4K@60Hz
- Length: 1M, 1.8M, 3M, 5M
- Options: **A1:** 1080P, **A2:** 4K@30Hz, **A3:** 4K@60Hz



## Mini DisplayPort to HDMI Cable

- Model No.: FS12302A
- Mini DP Male/HDMI Male
- ABS Shell
- Support Up to 4K@60Hz
- Length: 0.2M
- Options: **A1:** 1080P, **A2:** 4K@30Hz, **A3:** 4K@60Hz



## Braided 8K DisplayPort to HDMI Cable

- Model No.: FS12005B
- DP Male/HDMI Male
- Aluminum Shell, Braided Cable
- Support Up to 8K@60Hz
- Length: 1M, 1.8M, 3M
- Options: **B1**: 4K@60Hz, **B2**: 8K@60Hz



## Braided 8K Mini DisplayPort to HDMI Cable

- Model No.: FS12302B
- Mini DP Male/HDMI Male
- Aluminum Shell, Braided Cable
- Support Up to 8K@60Hz
- Length: 0.2M
- Options: **B1**: 4K@60Hz, **B2**: 8K@60Hz



## DisplayPort to DVI Cable

- Model No.: FS12006
- DP Male/DVI-D 24+1 male
- Support 1920\*1080@60hz
- Length: 1M, 1.8M, 3M



## Mini DisplayPort to DVI Cable

- Model No.: FS12303
- MINI DP Male/DVI-D 24+1 Male
- Support 1920\*1080@60Hz
- Length: 1M, 1.8M, 3M



## DisplayPort to VGA Cable

- Model No.: FS12007
- DP Male/VGA HD15 Male
- Support 1920\*1080@60hz
- Length: 1M, 1.8M, 3M



## Mini DisplayPort to VGA Cable

- Model No.: FS12304
- MINI DP Male/VGA Male
- Support 1920\*1080@60Hz
- Length: 1M, 1.8M, 3M



## 4K Mini DisplayPort to DisplayPort Cable

- Model No.: FS12105A
- ABS Shell
- Mini DP Male/DP Male
- Support 4K@60Hz
- Length: 1M, 1.8M, 3M



## 8K Mini DisplayPort to DisplayPort Cable

- Model No.: FS12105A
- Braided cable, Aluminum Shell
- Mini DP Male/DP Male
- Support 8K@60Hz
- Length: 1M, 1.8M, 3M



## DisplayPort male to Mini DisplayPort female Cable

- Model No.: FS12015
- DP Male/Mini DP Female
- Support 4K@60hz
- Length: 1M, 1.8M, 3M



## Mini DisplayPort Extension Cable

- Model No.: FS12306
- Mini DP Female/ Mini DP Female
- Support 4K@60hz
- Length: 1M, 1.8M, 3M



## 8K DisplayPort to HDMI Adapter

- Model No.: FS12101B
- MINI DP Male/HDMI Female
- Aluminum Shell, Braided cable
- Support Up to 8K@60Hz
- Length: 0.2M
- Options: **B1:** 4K@60Hz, **B2:** 8K@60Hz



## 8K Mini DisplayPort to HDMI Adapter

- Model No.: FS12401B
- MINI DP Male/HDMI Female
- Aluminum Shell, Braided cable
- Support Up to 8K@60Hz
- Length: 0.2M
- Options: **B1:** 4K@60Hz, **B2:** 8K@60Hz



## DisplayPort to HDMI Adapter

- Model No.: FS12401A
- DP Male/HDMI Female
- ABS Shell
- Support Up to 4K@60Hz
- Length: 0.2M
- Options: **A1:** 1080P, **A2:** 4K@30Hz, **A3:** 4K@60Hz



## Mini DisplayPort to HDMI Adapter

- Model No.: FS12401A
- MINI DP Male/HDMI Female
- ABS Shell
- Support Up to 4K@60Hz
- Length: 0.2M
- Options: **A1:** 1080P, **A2:** 4K@30Hz, **A3:** 4K@60Hz



## DisplayPort to DVI Adapter

- Model No.: FS12102A
- DP Male/DVI 24+5 Female
- Support 1920\*1080@60Hz
- Length: 0.2M



## Mini DisplayPort to DVI Adapter

- Model No.: FS12402
- MINI DP Male/DVI 24+5 Female
- Support 1920\*1080@60Hz
- Length: 0.2M



## Mini DisplayPort to VGA Adapter

- Model No.: FS12103A
- DP Male/VGA Female
- Support 1920\*1080@60Hz
- Length: 0.2M



## Mini DisplayPort to VGA Adapter

- Model No.: FS12403A
- MINI DP Male/VGA Female
- Support 1920\*1080@60Hz
- Length: 0.2M



## 8K Mini DisplayPort to DisplayPort Adapter

- Model No.: FS12404B
- MINI DP Male/ DP Female
- Aluminum Shell, Braided cable
- Support 4K@60Hz
- Length: 0.2M



## Mini DisplayPort to DisplayPort Adapter

- Model No.: FS12404A
- MINI DP Male/ DP Female
- Injection mold
- Support 4K@60Hz
- Length: 0.2M





## DisplayPort to HDMI/VGA 2 in 1 Adapter

- Model No.: FS12104
- DP Male/HDMI/VGA Female
- HDMI Support 4K@30Hz
- VGA Support 1920\*1080@60Hz
- Length: 0.2M



## Mini DisplayPort to HDMI/VGA 2 in 1 Adapter

- Model No.: FS12405A
- MINI DP Male/HDMI/VGA Female
- HDMI Support 4K@30Hz
- VGA Support 1920\*1080@60Hz
- Length: 0.2M



## DisplayPort to HDMI/DVI/VGA 3 in 1 Adapter

- Model No.: FS12105
- DP Male/HDMI,DVI,VAG Female
- Length: 0.2M
- A: HDMI 4K@30Hz, DVI/VGA 1080P
- B: HDMI /DVI/VGA all 1080P



## Mini DisplayPort to HDMI/DVI/VGA 3 in 1 Adapter

- Model No.: FS12406
- MiniDP Male/HDMI,DVI,VAG Female
- Length: 0.2M
- A: HDMI 4K@30Hz, DVI/VGA 1080P
- B: HDMI /DVI/VGA all 1080P



## DisplayPort to Dual DP/HDMI Multi Monitor Adapter

- FS12106A: DP to 2DP
- FS12106B: DP to 2HDMI
- Support MST(only windows), SST
- 4K@60Hz for single port, 4K@30Hz for dual port
- Length: 0.15M



## Mini DisplayPort to Dual DP/HDMI Multi Monitor Adapter

- FS12407A: Mini DP to 2DP
- FS12407B: Mini DP to 2HDMI
- Support MST(only windows), SST
- 4K@60Hz for single port, 4K@30Hz for dual port
- Length: 0.15M



4K DP/M-HDMI/F  
FS12201A



4K DP/M-HDMI/F  
FS12205A



4K DP/M-HDMI/F  
FS12206A



4K DP/M-HDMI/F  
FS12204A



4K Mini DP/M-DP/F  
FS12502A



4K DP/M-HDMI/F  
FS12501



8K DP/M-HDMI/F  
FS12201B



8K DP/F-DP/F  
FS12205B



8K DP/M-DP/F  
FS12206B



8K Angle DP/M-DP/F  
FS12207  
L: left R: right  
U: up D: down



8K DP/M-MDP/F  
FS12204B



8K DP/F-MDP/M  
FS12502B

## DVI M/M Cable

- FS14001A: DVI-D Signal link 18+1
- FS14001B: DVI-D Dual link 24+1
- FS14001C: DVI-I Dual link 24+5
- Support 1920\*1080/2580\*1600
- Length: 1m, 1.8m, 3m, 5m, 7.5m, 10m



## DVI M/F Extension Cable

- FS14002A: DVI-D Signal link 18+1
- FS14002B: DVI-D Dual link 24+1
- FS14002C: DVI-I Dual link 24+5
- Support 1920\*1080/2580\*1600
- Length: 1m, 1.8m, 3m, 5m, 7.5m, 10m



## VGA M/M Monitor Cable

- Model No.: FS15001
- VGA Male to Male
- Support 1920\*1080@60Hz
- Length: 1m, 1.8m, 3m, 5m, 7.5m, 10m, 15m, 20m, 25m, 30m



## VGA M/F Extension Cable

- Model No.: FS15003
- VGA Male to Female
- Support 1920\*1080@60Hz
- Length: 1m, 1.8m, 3m, 5m, 7.5m, 10m, 15m, 20m,



## DVI/VGA Adapter



FS14003  
DVI/M-VGA/F



FS14101  
DVI/M-VGA/F With Chip



FS14103  
DVI/M-VGA/F



FS14104  
DVI/F-VGA/M



FS15104  
VGA/M-Dual VGA/F



FS14106  
DVI/F-DVI/F




FS15101  
HD15 Gender F/F



FS15102  
HD15 Gender M/F

## U/UTP Ethernet Patch Cable

- Model No.: FS17100
- 24 or 26AWG Copper or CCA
- Color, Jacket level customized
- Length: 0.3m-55m
- Options: CAT5E/CAT6/CAT6A



## Flat U/UTP Ethernet Patch Cable

- Model No.: FS17101
- 30AWG Copper or CCA
- Color, Jacket level customized
- Length: 0.3m-55m
- Options: CAT5E/CAT6/CAT6A



## 28AWG Slim U/UTP Ethernet Patch Cable

- Model No.: FS17102
- 28AWG OD: 3.8mm
- Color, Jacket level customized
- Length: 0.3m-45m
- Options: CAT5E/CAT6/CAT6A



## 32AWG U/UTP Ultra slim Ethernet Patch Cable

- Model No.: FS17103
- 32AWG OD: 2.8mm
- Color, Jacket level customized
- Length: 0.3m-25m
- Options: CAT5E/CAT6/CAT6A



## 32AWG Flexible Flat U/UTP Short mode Patch Cable

- Model No.: FS17106
- 32AWG Flat cable OD: 1.5\*6.0mm
- Color, Jacket level customized
- Length: 0.3m-25m
- Options: CAT5E/CAT6/CAT6A



## F/UTP Shielded Ethernet Patch Cable

- Model No.: FS17120
- 24 or 26AWG Copper or CCA
- Color, Jacket level customized
- Length: 0.3m-55m
- Options: CAT5E/CAT6



## S/FTP Ethernet Patch Cable

- Model No.: FS17121
- 24 or 26AWG Copper or CCA
- Color, Jacket level customized
- Length: 0.3m-55m
- Options: CAT5E/CAT6/CAT6A/CAT7/CAT8



## Braided S/FTP Ethernet Patch Cable

- FS17124: Braided round cable
- FS17125: Braided flat cable
- 24, 26, 28AWG Copper
- Color, Jacket level customized
- Length: 0.3m-55m
- Options: CAT5E/CAT6/CAT6A/CAT7/CAT8



## 32AWG F/FTP Ultra slim Ethernet Patch Cable

- Model No.: FS17123
- 32AWG OD: 2.8mm
- Color, Jacket level customized
- Length: 0.3m-25m
- Options: CAT5E/CAT6/CAT6A/CAT7/CAT8



## 32AWG Flat F/FTP Patch Cable

- Model No.: FS17122
- 32AWG Flat cable OD: 1.5\*6.0mm
- Color, Jacket level customized
- Length: 0.3m-25m
- Options: CAT5E/CAT6/CAT6A/CAT7/CAT8



## Angle F/UTP, S/FTP Ethernet Patch Cable

- FS17128A: F/UTP
- FS17128B: S/FTP
- 24 or 26AWG Copper or CCA
- Color, Jacket level customized
- Length: 0.3m-55m
- Options: CAT5E/CAT6/CAT6A/CAT7/CAT8



## Pre-Terminated M/F Copper Trunk Cable

- FS17144: Unshielded
- FS17145: Shield
- Customized plug quantity
- 24AWG Copper
- Length: 3M-20M
- Options: CAT5E/CAT6/CAT6A/CAT7/CAT8



## Pre-Terminated M/M Copper Trunk Cable

- FS17140: Unshielded
- FS17141: Shield
- Customized plug quantity
- 24AWG Copper
- Length: 3M-20M
- Options: CAT5E/CAT6/CAT6A/CAT7/CAT8



## Pre-Terminated F/F Copper Trunk Cable

- FS17142: Unshielded
- FS17143: Shield
- Customized plug quantity
- 24AWG Copper
- Length: 3M-20M
- Options: CAT5E/CAT6/CAT6A/CAT7/CAT8




## RJ45 M/F Ethernet extension cable

- FS17150: CAT5E/CAT6
- FS17151: CAT6A/CAT7/CAT8 keystone type
- Shielded FTP Male to Female
- All angle type available
- Length: 0.3m-1.5m



## RJ45 F/F F/2F Ethernet inline coupler

- Model No.: FS17300
- RJ45 Feale to RJ45 Female
- Plug and play, no power supply and any drivers are required
- Compatible with Cat7, Cat6, Cat5e network



## Power Over Ethernet Splitter

- Model No.: FS17152-100M or Gigabit
- Input Voltage: 48-56v
- 12V DC power output (12V, 1-2A, 15 watts)
- DC barrel Plug: 5.5\*2.1mm
- Power Pin: 1236/4578
- Transmission distance: max 100M
- Complies with the IEEE 802.3af/at standard
- Length: 0.2M



## UTP 90 Degree Keyston Jack

- Model No.: FS17500-C5E/C6/C6A
- Fit for wires AWG22-26
- Meet ISO/IEC 11801,TIA/EIA568C
- Material: PC/ABS for cover, PC for modulephosphor bronze for IDC
- Color: White



## UTP 180 Degree Keyston Jack

- Model No.: FS17501-C5E/C6/C6A
- Fit for wires AWG22-26
- Meet ISO/IEC 11801,TIA/EIA568C
- Material: PC/ABS for cover, PC for modulephosphor bronze for IDC
- Color: White



## Tooless Unshielded 180 Degree Keyston Jack

- Model No.: FS17502-C5E/C6/C6A
- Fit for wires AWG22-26
- Meet ISO/IEC 11801,TIA/EIA568C
- Material: PC/ABS for cover, PC for modulephosphor bronze for IDC
- Color: White





## Toolless Shielded 180 Degree Keystone Jack

- Model No.: FS17503-C5E/C6/C6A
- Cat 8 Model: FS17507
- Fit for wires AWG22-26
- Meet ISO/IEC 11801, TIA/EIA568C
- Material: PC/ABS for cover, PC for module phosphor bronze for IDC




## In-line Coupler-Keystone jack, Unshielded Type

- Model No.: FS17508
- Female to Female
- Unshielded Type
- More Color options
- Options: CAT5E/CAT6/CAT6A




## In-line Coupler-Keystone jack, Shielded Type

- Model No.: FS17509
- Female to Female
- Shielded Type
- More Color options
- Options: CAT5E/CAT6/CAT6A



## In-line Connection Box, Unshielded Type

- Model No.: FS17511
- Female to Female Coupler
- Unshielded Type
- Black, White
- Options: CAT5E/CAT6/CAT6A



## In-line Connection Box, Shielded Type

- Model No.: FS17512
- Female to Female Coupler
- Shielded Type
- More Color options
- Options: CAT5E/CAT6/CAT6A



## Surface Mount Box

- FS17515: Unshielded 1 port, 2 port
- FS17516: Shielded 1 port, 2 port
- Housing: PC/ABS.
- IDC Terminate: Phosphor bronze with Tin plated.
- Support T568A and T568B wiring standards and accept 110 or Krone punch-down tools.



## Field Termination Plug, toolless unshielded type

- Model No.: FS17540
- Unshielded Type
- Toolless
- Options: CAT5E/CAT6/CAT6A




## Field Termination Plug, toolless shielded type

- Model No.: FS17541
- Shielded Type
- Toolless
- Options: CAT5E/CAT6/CAT6A/CAT8



## Field assembly cable connector, Toolless slim type

- Model No.: FS17544
- Unshielded Type
- Toolless slim type
- Options: CAT5E/CAT6/CAT6A



## Field assembly cable connector, Toolless slim type

- Model No.: FS17546
- Shielded Type
- Toolless slim type
- Options: CAT5E/CAT6/CAT6A/CAT8



## Fiber Patch Cable, OS2 Single Mode

- Model No.: FS17300
- Fiber model: G652D/G657A1/G657A2
- Jacket color: Yellow
- Connector: FC/LC/SC/ST
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 0.9/2.0/3.0mm
- Length: 0.2m-50m



## OM1/OM2 Multimode patch cable

- FS17301: OM1
- FS17302: OM2
- Jacket color: Orange
- Connector: LC/SC/FC/ST/MU/DIN/E2000/MT-RJT
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 0.9/2.0/3.0mm
- Length: 0.2m-50m



## OM3 Multimode patch cable

- Model No.: FS17303
- Jacket color: Blue
- Connector: LC/SC/FC/ST/MU/DIN/E2000/MT-RJT
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 0.9/2.0/3.0mm
- Length: 0.2m-50m



## OM4 Multimode patch cable

- Model No.: FS17304
- Jacket color: Blue
- Connector: LC/SC/FC/ST/MU/DIN/E2000
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 0.9/2.0/3.0mm
- Length: 0.2m-50m



## OM5 Multimode patch cable

- Model No.: FS17305
- Jacket color: Green
- Connector: LC/SC/FC/ST/MU/DIN
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 0.9/2.0/3.0mm
- Length: 0.2m-50m



## MTP/MPO Jumpers

- Model No.: FS17320
- Fiber model: OS2/OM1, 2, 3, 4
- Core number: 6C/8C/12C/24C
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-30m



## MTP/MPO Breakout cable

- Model No.: FS17321
- Fiber model: OS2/OM4
- Type: Y type/ 1\*3 type /2\*3 type
- Connector A: MTP-12/16/24 male or Female
- Connector B: MTP-4/8/12 Female
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-50m



## MTP/MPO Trunk cable

- Model No.: FS17322
- Fiber model: OS2/OM1, 2, 3, 4
- Core number: 12C/24C/36C/48C
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-30m



## MTP/MPO Harnesses

- Model No.: FS17323
- Fiber model: OS2/OM1, 2, 3, 4
- Connector A: MTP-8/16 Female
- Connector B: LC/MDC
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-10m




## MMC Jumpers

- Model No.: FS17324
- Fiber model: OS2 9/125μm
- Connector: MMC Female to Female
- Polarity: Jumper Polarity
- Polish Type: APC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-30m




## Armored Fiber patch cable

- Model No.: FS17330
- Fiber model: OS2/OM1, 2, 3, 4
- Core number: 6C/8C/12C/24C
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-30m



## Industrial Armored Fiber patch cable

- Model No.: FS17331
- Fiber model: OS2/OM1, 2, 3, 4
- Core number: 1C/2C/4C/6C/8C/12C/24C
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- Length: 1m-30m




## High Density Uniboot Cable

- Model No.: FS17332
- Fiber model: OS2/OM1, 2, 3, 4
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- Type: Flat Clip/Push-pull boot/Push-pull Tab/Standard Clip/Swithable clip
- Length: 1m-30m



## FTTA Fiber patch cable

- Model No.: FS17333
- Fiber model: OS2 9/125μm
- Designed for Outdoor Base Station Construction
- Application: Outdoor, Heavy Industrial
- Water /UV/wear/FlamResistance
- Length: 1m-30m



## Multifiber Breakout Cables

- Model No.: FS17334
- Fiber model: OS2/OM1, 2, 3, 4
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Application: Indoor/Outdoor
- Length: 1m-30m



## Mode Conditioning Fiber patch cable

- Model No.: FS17335
- Fiber model: OS2/OM1, 2, 3, 4
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-30m



## Polarization Maintaining Fiber Patch Cable

- Model No.: FS17336
- Fiber model: OS2
- Excellent Birefringence and Low Attenuation
- Connector Type: LC/SC/FC/ST Simplex
- Mode-field Diameter (μm): 5.5 ± 0.5(PM850), 9.0 ± 0.5(PM1310), 10.5 ± 0.5(PM1550)
- Length: 1m-30m




## Fiber Pigtail

- Model No.: FS17350
- Fiber model: OS2/OM3
- Color-Coded Cable Jacket for Easy Identification
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-30m



## 12 Fibers Pigtail

- Model No.: FS17351
- Fiber model: OS2/OM3
- Cable type: Color-Coded or Bunch
- Polish Type: APC UPC
- Jacket: PVC/LSH/OFNP/OFNR/PE/TPU
- OD: 3.0/4.0/4.5/5.0mm
- Length: 1m-30m



**Universal Power Cord NEMA 5-15P to IEC320 C13**

- Model No.: FS13000
- Cable: 3\*18AWG/16AWG/14AWG
- NEMA 5-15P Male to C13 Female
- Input Current/Voltage: 10A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**Hospital Grade Power Cord NEMA 5-15P to IEC320 C13**

- Model No.: FS13001
- Cable: 3\*16AWG/14AWG
- NEMA 5-15P Male to C13 Female
- Input Current/Voltage: 15A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**NEMA 5-15P to C19 AC Power Cord**

- Model No.: FS13002
- Cable: 3\*14AWG Copper
- NEMA 5-15P Male to C19 Female
- Input Current/Voltage: 15A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**NEMA 5-15P to IEC320 C5 Power Cord**

- Model No.: FS13003
- Cable: 3\*18AWG/16AWG/14AWG
- NEMA 5-15P Male to C15 Female
- Input Current/Voltage: 10A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**3.5mm Audio Splitter Cable**

- Model No.: FS13004
- Cable: 3\*16AWG
- NEMA 5-15P Male to Female
- Input Current/Voltage: 13A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**Power Cord Splitter Cable**

- Model No.: FS13005-2/3/4/5
- Cable: 3\*16AWG Copper
- NEMA 5-15P Male to 2/3/4/5 Female
- Input Current/Voltage: 13A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**IEC320 C14 to IEC320 C13 Power Cord**

- Model No.: FS13000
- Cable: 3\*18AWG
- IEC320 C14 to IEC320 C13
- Input Current/Voltage: 10A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**NEMA 1-15P to IEC320 C7 Power Cord**

- Model No.: FS13000
- Cable: 3\*18AWG
- IEC320 C14 to IEC320 C13
- Input Current/Voltage: 10A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**Outdoor Extension Cord 1 to 3 Splitter**

- Model No.: FS13005-2/3/4/5
- Cable: 3\*16AWG Copper
- NEMA 5-15P Male to 3\*Female
- Input Current/Voltage: 13A/125V
- UL certificated
- Main cable Length: 22ft
- Splitter cable Length: 6ft\*3

**Heavy Duty Outdoor Extension Cord for lightning**

- Model No.: FS13005-3/6
- Cable: 3\*16AWG Copper
- NEMA 5-15P Male to 3/6 Female with Protective Covers
- Input Current/Voltage: 13A/125V
- UL certificated
- 3x: 9ft+8ft+8ft
- 6x: 10ft+8ft+8ft+8ft+8ft+8ft





**Waterproof Power Cord NEMA 5-15P to NEMA 5-15R**

- Model No.: FS13010
- Cable: 3\*16AWG
- NEMA 5-15P Male to Female
- Input Current/Voltage: 13A/125V
- UL certificated
- Length: 1m, 1.8m, 3m, 5m

**European Power Cord CEE 7/7 to IEC320 C13**

- Model No.: FS13020
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>/2.5m<sup>2</sup>
- CEE 7/7 Male to C13 Female
- Input Current/Voltage: 16A Max/250V
- VDE or CE certificated
- Length: 1m, 1.8m, 3m, 5m

**European Power Cord angle CEE 7/7 to IEC320 C13**

- Model No.: FS13021
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>/2.5m<sup>2</sup>
- CEE 7/7 Male to C13 Female
- Input Current/Voltage: 16A Max/250V
- VDE or CE certificated
- Length: 1m, 1.8m, 3m, 5m

**European Power Cord IEC320 C7 to CEE 7/16**

- Model No.: FS13023
- Cable: 2\*0.75m<sup>2</sup>
- CEE 7/16 Male to C7 Female
- Input Current/Voltage: 2.5A/250V
- VDE or CE certificated
- Length: 1m, 1.8m, 3m, 5m

**European Power Cord CEE 7/7 to IEC320 C5**

- Model No.: FS13022
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>
- CEE 7/7 Male to C5 Female
- Input Current/Voltage: 10A/250V
- VDE or CE certificated
- Length: 1m, 1.8m, 3m, 5m

**Waterproof European Power Extension Cord CEE 7/7**

- Model No.: FS13020
- Cable: 3\*1.0m<sup>2</sup>/1.5m<sup>2</sup>/2.5m<sup>2</sup>
- CEE 7/7 Male to Female
- Input Current/Voltage: 16A Max/250V
- VDE or CE certificated
- Length: 1m, 1.8m, 3m, 5m

**Australia Power Cord IEC320 C13 to AS3112**

- Model No.: FS13030
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>
- AS3112 Male to C13 Female
- Input Current/Voltage: 10A/250V
- SAA certificated
- Length: 1m, 1.8m, 3m, 5m

**Australia Power Cord IEC320 C13 to AS3112**


- Model No.: FS13031
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>
- AS3112 Male to C13 Female
- Input Current/Voltage: 10A/250V
- SAA certificated
- Length: 1m, 1.8m, 3m, 5m

**Waterproof Power Cord IEC320 C13 to AS3112**

- Model No.: FS13032
- Cable: 3\*1.0m<sup>2</sup>/1.5m<sup>2</sup>
- AS3112 Male to C13 Female
- Input Current/Voltage: 10A/250V
- SAA certificated
- Length: 1m, 1.8m, 3m, 5m

**Japanese Power Cord 2 Pin to IEC320 C13**

- Model No.: FS13040
- Cable: 3\*0.75/1.25/2.0m<sup>2</sup>
- 2-pin with earth wire to C13 Female
- Input Current/Voltage: 10A/125V
- PSE certificated
- Length: 1m, 1.8m, 3m, 5m



**Japanese Waterproof extension cable**

- Model No.: FS1341
- Cable: 3\*0.75/1.25/2.0m<sup>2</sup>
- 2PIN Male to Female
- Input Current/Voltage: 12A/125V
- PSE certificated
- Length: 1m, 1.8m, 3m, 5m

**UK Power Cord BS1363 to IEC320 C13**

- Model No.: FS13060
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>
- BS1363 Male to C13 Female
- Input Current/Voltage: 5/10/13A /250V
- BS certificated
- Length: 1m, 1.8m, 3m, 5m

**South Africa, India, Russia Power Cord**

- Model No.: FS13061
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>
- 3 PIN Male to C13 Female
- Input Current/Voltage: 10A/250V
- SABS/ISI/EAC certificated
- Length: 1m, 1.8m, 3m, 5m

**Brazil 14136 Plug Type to IEC320 C13 Power Cord**


- Model No.: FS13062
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>
- NBR14136 Male to C13 Female
- Input Current/Voltage: 10A/250V
- UC certificated
- Length: 1m, 1.8m, 3m, 5m

**Switzerland 3 Pin Plug to IEC320 C13 Power Cord**

- Model No.: FS13063
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>
- 3PIN Male to C13 Female
- Input Current/Voltage: 10A/250V
- SEV certificated
- Length: 1m, 1.8m, 3m, 5m

**Italy 3 Pin Plug to IEC320 C13 Power Cord**

- Model No.: FS13064
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>
- BS1363 Male to C13 Female
- Input Current/Voltage: 10A/250V
- IMQ certificated
- Length: 1m, 1.8m, 3m, 5m

**Israel 3Pin Plug Type to IEC320 C13 Power Cord**


- Model No.: FS13065
- Cable: 3\*0.75m<sup>2</sup>/1.0m<sup>2</sup>/1.5m<sup>2</sup>
- BS1363 Male to C13 Female
- Input Current/Voltage: 10A/250V
- SII certificated
- Length: 1m, 1.8m, 3m, 5m

**American Surge Protector Power Strip, 2/3/4/5/6/8 Outlets**

- Model No.: FS13301
- Cable: 3\*14AWG Copper
- Spe: 15A/125V/1875W/60HZ
- Power on/off switch
- Material: PC+ABS, White/Black
- UL certificated
- Length: 6ft

**EU Power Strip with swith, 2/3/4/5/6 Outlets**

- Model No.: FS13302
- Cable: 3\*1.5m<sup>2</sup> Copper
- Spe: 16A/250V/2500W
- Power on/off switch
- Material: ABS
- CE certificated
- Length: 1.5M

**Universal Power Strip 6 Outlets with 3 USB and Type-C**

- Model No.: FS13303
- Cable: 3\*14AWG Copper
- Spe: 10A/250V
- Power on/off switch
- Material: ABS, White/Black
- UL certificated
- Length: 6ft



## DC Power Cable, 5.5\*2.1 male to male

- Model No.: FS13100
- Conn type: 5.5\*2.1mm male to male
- Cable: UL2464 22AWG
- Jacket: PVC
- DC input: 12V
- Length: 0.25m, 0.5m, 1m, 2m



## DC Power Extension Cable

- Model No.: FS13101
- Conn type: DC5521 5525 4017 2507 35135 6530
- Cable: UL2464 20/18/16AWG
- DC input: 12V
- Length: 0.5/1/1.5/2/3/5/8/10/15/20m



## DC Power Splitter Cable

- Model No.: FS13102
- Conn type: 5521 female to 2/3/4/7\*female
- Main Cable: 20AWG
- Branch cable: 24AWG
- DC input: 12V
- Length: 0.15M+0.2M



## DC7909 to Solar Panel Power cable

- Model No.: FS13103
- Conn type: DC7909 to 30A/45A Power Pole
- Compatible With Anderson Powerpole
- Cable: UL2464 16AWG OD6.2mm
- Jacket: PVC
- Rated Voltage/Current: DC 48V 30
- Length: 0.5m, 1m, 1.5m



## USB C to DC Cable, PD Charging

- Model No.: FS13104
- Conn type: USB C male to 5525 male
- Cable: UL1185 18AWG
- Jacket: PVC
- Support PD9V, 12V, 15V, 20V
- Length: 0.5m, 1m, 2m



## Waterproof Mini DC to DC Power Cable for Starlink

- Model No.: FS13144
- Conn type: 5.5\*2.1mm male to male
- Cable: UL1185 18AWG OD4.0mm
- Jacket: PVC, Grey
- IP68 Waterproof
- Length: 2m, 3m, 5m



## Waterproof Mini DC to USB C Cable for Starlink

- Model No.: FS13145
- Conn type: 5.5\*2.1mm male to USB C male
- Cable: UL1185 18AWG OD4.0mm
- Jacket: PVC, Grey
- IP68 Waterproof
- Length: 2m, 3m, 5m



## Waterproof Mini DC to Car Charge Cable

- Model No.: FS13146
- Conn type: 5.5\*2.1mm male to car charge plug
- Cable: UL1185 18AWG OD4.0mm
- Jacket: PVC, Grey
- IP68 Waterproof
- Length: 2m, 3m, 5m



## USB to DC 5V Power Cord

- Model No.: FS13121
- DC type: DC5521 5525 4017 2507 35135 6530
- Cable: UL2464 22AWG
- Straight-through cable
- Support 5V/ Less than 3A
- Length: 0.5/1/2m



## USB Male/Female, 2PIN/4PIN extension cable

- Model No.: FS13122
- 2C cable: 22AWG 17/0.15mm
- 4C cable: 28AWG 7/0.12mm
- Jacket: PVC
- Angle plug available
- Mini USB, Micro USB, USB C available
- Length: 0.3m, 1m,



## Waterproof DC M/F cable to Open End

- FS13130: 3.5\*1.35mm
- FS13131: 5.5\*2.1mm
- Cable: UL2464 22/18AWG
- Jacket: PVC
- With screw nut, IP67 level
- Length: 0.3m



## Waterproof 2/3/4P M/F cable to Open End

- Model no.: FS13132-2P/3P/4P
- Cable: UL2464 24/22/20/18AWG
- Jacket: PVC
- With screw nut, IP67 level
- Length: 0.3m



## Waterproof M6 2/3/4/5P M/F cable to Open End

- Model no.: FS13133-2P/3P/4P/5P
- Cable: UL2464 26/24AWG
- Jacket: PVC
- IP65 level
- Length: 0.25m



## Waterproof M8 2/3/4/5P M/F cable to Open End

- Model no.: FS13134-2P/3P/4P/5P
- Cable: UL2464 26/24AWG
- Jacket: PVC
- IP65 level
- Length: 0.25m



## Waterproof M12 2/3/4/5/6/7/8P M/F cable to Open End

- Model no.: FS13135-/2P/3P/4P/5P/6P/7P/8P
- Cable: UL2464 24AWG
- Jacket: PVC
- With screw nut, IP67 level
- Length: 0.2m



## Waterproof 30A M25 3P M/F cable to Open End

- Model no.: FS13136
- Cable: RVV 3\*4mm<sup>2</sup> 56/0.3mm
- OD: 12mm
- Jacket: PVC
- With screw nut, IP67 level
- Length: 0.3m



## MC4 Solar Panel Extension Cable, 2-Piece Set

- Model no.: FS13141
- Conn: MC4 M-F
- Cable: 2.5/4/6 sqm
- Jacket: Black/Red silicone
- IP67 level, PPO housing
- Rate voltage: DC1000V/1500V
- Length: 1m, 2m, 3m, 5m, 10m



## MC4 Solar Panel M/F to open end, Red, Black 2-Piece Set

- Model no.: FS13142
- Conn: MC4 M/F to Open
- Cable: 2.5/4/6 sqm
- Jacket: Black/Red silicone
- IP67 level, PPO housing
- Rate voltage: DC1000V/1500V
- Length: 1m, 2m, 3m, 5m, 10m



## Y Type Parallel MC4 Connecto, 2-Piece Set

- Model no.: FS13143
- Conn: MFF+FMM
- Y-3/Y-4 available
- Cable: 4/6 sqm
- Jacket: Black/Red silicone
- IP67 level
- Rate voltage: DC1000V/1500V
- Length: 0.3m



## Parallel Battery Cable, Red, Black 2-Piece Set

- Model no.: FS13151
- Cable: 10/16/25 sqm or 4/6/8AWG
- Jacket: Black/Red
- Crimping Terminal space: 5/6/8/10mm
- Length: 0.2/0.3/0.5/0.8/1.0/1.5/2m





## Wall Charger, 5V1A, 2A, 2.4A

- Model No.: FS13200
- Input: 100-240V 50/60Hz 0.15A max
- Output: 5V1A, 5V2A, 5V2.4A
- Color: White, Black
- Plug: US, EU, UK, AU,JP, KR,
- Certificate: UL CB CE FCC ROHS KC KCC



## Wall Charger, 5V2.4A, 3.4A 2/3 port

- 2/3 ports.: FS13201/FS13202
- Input: 100-240V 50/60Hz 0.35A max
- Output: 5V2A 5V2.4A 5V3.4A
- Color: White, Black
- Plug: US, EU, UK, AU,JP, KR,
- Certificate: UL CB UKCA KC KCC CE FCC ROHS PSE



## QC 3.0 Wall Charger

- Model No.: FS13203
- Input: 100-240V 50/60Hz 0.5A max
- Output: 5V3A 9V2A 12V1.5A(18W Max)
- Color: White, Black
- Plug: US, EU, UK, AU,JP, KR,
- Certificate: UL CB UKCA KC KCC CE FCC ROHS



## PD 45W/35W/25W/20W/18W Fast charger

- Model No.: FS13204-45/35/30/25/20/18W
- Input: 100-240V 50/60Hz 1.2A max
- Output: 5V3A/9V2A/9V2.22A/12V1.5A  
12V1.67A/12V2.5A/ 15V/2A/15V3A/ 20V2.25A...
- Color: White, Black
- Plug: US, EU, UK, AU,JP, KR,
- Certificate: UL CB UKCA KC KCC CE FCC ROHS UKCA



## PD100W/65W GaN fast charger

- Model No.: FS13205-100W/60W
- Input: 100-240V 50/60Hz 2A max
- Output: 5V3A/9V3A/12V3A/15V3A/20V3.25A  
/20V5A, (PPS)3.3V/20V5A 100W Max
- Color: White, Black
- Plug: US, EU, UK, AU,JP, KR,
- Certificate: UL CB UKCA KC KCC CE FCC ROHS



## Dual USB C PD 65W/45W/35W/20W faster charger

- Model No.: FS13206-45/35/30/25/20/18W
- Input: 100-240V 50/60Hz 1.5A max
- C1/C2 Output: 65W/45W/35W/20W
- C1+C2 Output: total 65W/45W/35W/20W
- Color: White, Black
- Plug: US, EU, UK, AU,JP, KR,
- Certificate: UL CB UKCA KC KCC CE FCC ROHS UKCA



## Dual USB C PD 35W faster charger

- Model No.: FS13207
- Input: 100-240V 50/60Hz 1A max
- C1/C2 Output: 5V3A/9V3A/15V2.33A/20V1.75A
- C1+C2 Output: 18W+18W
- Color: White, Black
- Plug: US, EU, CN
- Certificate: CE/CCC/ETL/FCC



## USB A+C 65W/45W/35W/20W fast charger

- Model No.: FS13208-45/35/30/25/20/18W
- Input: 100-240V 50/60Hz 1.5A max
- A/C Output: 18W max/65W max
- A+C Output: total 65W/45W/35W/20W
- Color: White, Black
- Plug: US, EU, UK, AU,JP, KR,
- Certificate: UL CB UKCA KC KCC CE FCC ROHS UKCA



## 65W 2C1A GaN fast charger

- Model No.: FS13209
- Input: 100-240V 50/60Hz 1.5A max
- C1/C2/A Output: 65W/35W/30W
- C1+C2 Output: 45W+20W
- C1+A Output: 45W+18W; C2+A Output: 10W+10W
- C1+C2+A Output: 45W+10W+10W
- Color: White, Black
- Plug: US, EU, UK, AU,IN, KR
- Certificate: ETL CE FCC ROHS KC KCC



## 100W 2C2A GaN fast charger

- Model No.: FS13210
- Input: 100-240V 50/60Hz 1.5A max
- C1/C2/A1/A2 Output: 100/100/60/60W
- C1+C2=65W+30W
- A1+A2=5V4.8A=24W; C1+A1/A2=65W+30W
- C2+A1/A2=65W+30W; C1/C2+A1=65W+30W
- C1/C2+A2=65W+30W; C1/C2+A1/A2=65W+30W
- C1/C2+A1+A2=80W+10W+10W:  
C1+C2+A1/A2=60W+20W+20W
- C1+C2+A1+A2=60W+20W+10+10W
- Color: White, Black; Plug: US, EU, UK, AU, KR; Certificate: CE



## 120W 3C3A GaN fast charger

- Model No.: FS13212
- Input: 100-240V 50/60Hz 1.5A max
- PD1/2/3 Output: 65W/20W/20W
- A1/2/3 Output: 18W/18W/18W
- PD2+PD3=20W+20W
- PD2+A1=20W+18W
- Color: White, Black
- Plug: US, EU, UK, AU,IN, KR
- Certificate: ETL CE FCC ROHS KC KCC



## 520W 4C4A GaN fast charger

- Model No.: FS13214
- Input: 100-240V 50/60Hz 2A max
- PD1/2/3/4 Output: all 100W max
- A1/2/3/4 Output: all 30W max
- TYPE-C1+C2/C3/C4+USB-A1/A2/A3/A4: 65W+30W+30W
- TYPE-C2+C3/C4+USB-A1/A2/A3/A4: 65W+30W+30W
- TYPE-C1+C2+C3/C4+A1/A2/A3/A4: 45W+30W+30W+30W
- TYPE-C3+C4: 5V3A; USB-A1/A2/A3/A4+A4/A3/A2/A1: 5V-3A
- Color: Grey, Silver
- Plug: US, EU, UK, AU,IN, KR
- Certificate: FCC ETL CE SAA UKCA



## Fast Car Charger

- USB A: FS13230 QC3.0
- USB C: FS13231 PD65W
- Material: ABS/ Aluminum
- Input: 12-24V
- A Output: 5V3A 9V2A 12V1.5A
- A Output: 5V-3A,9V-3A,12V-3A,15V-3A,20V3.25A
- Certificate: CE, FCC, ROHS, KC



## Dual USB fast Car Charger

- USB A+A: FS13232
- USB A+C: FS13233
- Material: Aluminum
- Input: 12-24V
- A+A Output: 5V 2.4A/5V 2.4A
- A+C Output: A:18W, C:65W, A+C: 45W+18W
- Certificate: CE, FCC, ROHS, KC



## Dual USB C fast Car Charger

- Model: FS13234
- Material: Aluminum
- Input: 12-24V
- Version 1: 20W+20W max 40w
- Version 2: 30W+30W max 60w
- Version 3: 45W+45W max 90w
- Certificate: CE, FCC, ROHS, KC



## 3 in 1 car charger, Fast charging/Seat belt cutter/hammer

- USB A+A: FS13236
- USB A+C: FS13237
- Material: Zinc Alloy
- Input: 12-24
- A+A Output: 5V 2.4A/5V 2.4A
- A+C Output: A:18W, C:65W, A+C: 45W+18W
- Certificate: CE, FCC, ROHS, KC



## 2C1A fast Car Charger

- Model: FS13235
- Material: Aluminum
- Input: 12-24V
- C1/C2/A Output: 30/30/18W
- C1+C2 Output: 30W+30W, A+C: 15W+15W
- Certificate: CE, FCC, ROHS, KC



## Magnetic Wireless Charger

- Model No.: FS13250
- Color: White
- Input: 9V/2A 12V/1.67A
- Output: 15W/10W/7.5W/5W
- Cable length: 1m
- Certificate: CE,FCC,RHOS,Qi, PSE



## 3 in 1 Foldable Wireless Charging Station

- Model No.: FS13251
- Color: Balck ABS
- 360° foldable, easy to carry
- Vertical/Horizontal charging
- Output: 15W for phone, 3W for Airpods charging, and 2.5W for iWatchCable
- Ceritificate: CE,FCC,RHOS,Qi, PSE



## 3 in 1 Foldable Magnetic Wireless Charger

- Model No.: FS13252
- Color: balck ABS
- 360° foldable, easy to carry
- Vertical/Horizontal charging
- Output: 15W for phone, 3W for Airpods charging, and 2.5W for iWatchCable
- Certificate: CE,FCC,RHOS,Qi, PSE



## Replacement MacBook Charger, Magsafe

- Model No.: FS13271
- AC Input:100-240V 50/60Hz 1.5A
- Output: 40W/61W/87W/96W/1000W
- DC port: USB C or Mag3
- Plug: US, EU, UK, AU
- Length: 2m



## Replacement MacBook Charger, Magsafe

- Model No.: FS13270-L/T
- AC Input:100-240V 50/60Hz 1.5A
- Output: 45W/60W/85W
- magnetic Magsafe1/2: L tip or T tip
- Plug: US, EU, UK, AU
- Length: 1.45m



## USB C Power adapter, Suitable for most brands

- Model No.: FS13273
- AC Input:100-240V 50/60Hz
- Output: 45w/65w/90w/100w
- DC port: USB C
- Plug: US, EU, UK, AU
- DC Cable Length: 2M



## USB C Power adapter, Suitable for most brands

- Model No.: FS13272
- AC Input:100-240V 50/60Hz
- Output: 45w/65w/90w/100w
- DC port: USB C
- Plug: US, EU, UK, AU
- AC/DC Cable Length: 1.5M/1.2M



## Microsoft Surface Laptop Charger

- Model No.: FS13274
- AC Input:100-240V 50/60Hz 1.6A
- Output: 44w/65w
- DC port: MagSafe
- Plug: US, EU, UK, AU
- AC/DC Cable Length: 0.3M/1.8M



## Charger for HP Laptop, 4.5\*3.0mm Blue tip

- Model No.: FS13275
- AC Input: AC 100-240V 50-60Hz
- Output: 45w/65w/90w/120w/150w
- DC port: 4.5\*3.0mm Blue Tip
- Plug: US, EU, UK, AU
- AC/DC Cable Length:1.5M/1.2M



## Charger for HP Laptop, Round tip

- Model No.: FS13276
- AC Input: AC 100-240V 50-60Hz
- Output: 65w/90w/120w/150w
- DC port: 7.4\*5.0mm
- Plug: US, EU, UK, AU
- AC/DC Cable Length:1.5M/1.2M



## Charger for Dell Laptop Round Tip Power Adapter

- Model No.: FS13277
- AC Input: AC 100-240V 50-60Hz
- Output: 45/65/90/130/150/180/240w
- DC port: 7.4\*5.0mm
- Plug: US, EU, UK, AU
- AC/DC Cable Length:1.5M/1.2M



## Charger for Lenov Laptop, 4.5\*3.0mm Blue tip

- Model No.: FS13279
- AC Input: AC 100-240V 50-60Hz
- Output: 45w/65w
- DC port: 4.0\*1.7mm
- Plug: US, EU, UK, AU
- DC Cable Length: 1.8m



## Universal AC/DC Adapter Switching Power Supply

- Model No.: FS13260
- AC Input:100-240V 50/60Hz 0.25A
- Output:3V/4.5V/5V/6V/7.5V/9V/12V
- Output port: 5.5\*2.5 +8 Selectable Adapter
- Plug: US, EU, UK, AU
- Length: 1.45m



## Premium 3.5mm Stereo Audio Cable

- Model No.: FS18001B
- 3.5mm Stereo male to male
- Conductor: Copper
- Jacket: PVC/TPE
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m, 5m



## Premium 3.5mm Stereo Audio Cable

- Model No.: FS18002B
- 3.5mm Stereo male to male
- Conductor: Copper
- Jacket: PVC/TPE
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m, 5m



## Premium 3.5mm Audio Extens

- Model No.: FS18003B
- 3.5mm Stereo male to female
- Conductor: Copper
- Jacket: PVC/TPE
- Aluminum Shell
- Length: 0.5m, 1m, 1.2m, 2m, 3m, 5m



## Premium 3.5mm Audio Splitter Cable

- Model No.: FS18004B
- Aluminum Shell
- Conductor: Copper
- Jacket: PVC/TPE
- Length: 0.3m
- B1: 3PIN Male to 2 female
- B2: 4PIN Male to 2 female



## Premium Headphone Splitter Cable

- Model No.: FS18005B
- Aluminum Shell
- Conductor: Copper
- Jacket: PVC/TPE
- Input: 3.5mm 4 Position Female
- Output: 3.5mm male Headphone+Mic
- Length: 0.3m



## Premium 1/4 inch 6.35 TRS M/M Stereo Audio Cable

- Model No.: FS180040B
- 6.35mm male to male
- Conductor: Copper
- Jacket: PVC/TPE
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m, 5m



## Premium 3.5mm to 6.35mm Stereo Audio Cable

- Model No.: FS180041B
- 6.35mm male to 3.5mm male
- Conductor: Copper
- Jacket: PVC/TPE
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m, 5m



## Premium 3.5mm to dual 6.35mm Stereo Audio Cable

- Model No.: FS180042B
- 2x6.35mm male to 3.5mm male
- Conductor: Copper
- Jacket: PVC/TPE
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m, 5m



## Premium 3.5mm to 2 RCA Audio Cable

- Model No.: FS18006B
- 3.5mm Stereo Male
- RCA Male\* 2
- Conductor: Copper
- Jacket: PVC/TPE
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m



## Premium USB C to 2 RCA Cable Audio Cable

- Model No.: FS18044B
- USB-C Male
- RCA Male\* 2
- Conductor: Copper
- Jacket: PVC/TPE
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m





## Premium RCA to RCA Subwoof audio Cable

- Model No.: FS18008B
- RCA male to male
- Conductor: Copper
- Jacket: PVC/TPE/Mesh
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m, 5m



## Premium 2RCA to 2RCA Cable

- Model No.: FS18008B
- 2\* RCA male to 2\*RCA male
- Conductor: Copper
- Jacket: PVC/TPE/Mesh
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m, 5m



## Premium 3RCA to 3RCA Cable

- Model No.: FS18008B
- 3\*RCA male to 3 RCA male
- Conductor: Copper
- Jacket: PVC/TPE/Mesh
- Aluminum Shell
- Length: 1m, 1.5m, 2m, 3m, 5m



## 3.5mm to XLR TRS Cable

- FS180050A: 3.5mm to XLR male
- FS180050B: 3.5mm to XLR female
- Oxygen-Free Copper (OFC) conductor
- Length: 0.5m, 1m, 1.2m, 2m, 3m, 5m, 7.5m, 10m



## 6.35mm to XLR TRS Cable

- FS180051A: 6.35mm to XLR male
- FS180051B: 6.35mm to XLR female
- Oxygen-Free Copper (OFC) conductor
- Length: 0.5m, 1m, 1.2m, 2m, 3m, 5m, 7.5m, 10m



## XLR Microphone Cable for Speaker or PA System

- FS180052A: XLR M/M
- FS180052B: XLR M/F
- FS180052C: XLR F/F
- Oxygen-Free Copper (OFC) conductor
- Length: 0.5m, 1m, 1.2m, 2m, 3m, 5m, 7.5m, 10m



## RF Coaxial TV Aerial Cable

- Model No.: FS18031
- Male to Male
- Multilayer shielding
- Support up to 1080P
- Length: 0.5-30m



## 75 Ohm Coaxial BNC, SDI Video cable

- Model No.: FS18032
- Male to Male
- Multilayer shielding
- Support SD-SDI, HD-SDI, 3G-SDI
- Support up to 1080P
- Length: 0.5-30m



## Standard 75OHM RG6 Coax TV cable, F plug

- Model No.: FS18030
- Quad Shielded
- High-Speed Internet 3 GHZ
- Length: 0.5-30m



## Premium Toslink audio cable, Aluminum

- Model No.: FS18021
- Toslink Male to Male
- Aluminum Shell
- Gold plated connector
- Length: 0.5-30m



## USB to 3.5mm Audio External Stereo Sound Card

- Model No.: FS18152
- Male to 3.5mm jack
- Support audio and Microphone
- Built-in smart Chipset
- High quality sound
- Plug and play, support all system
- Length: 0.1m



## USB to Audio Jack Sound Card Adapter

- Model No.: FS18151
- USB Male to Dual 3.5mm jack
- Support audio and Microphone
- Built-in smart Chipset
- High quality sound
- Plug and play, support all system
- Length: 0.1m



## 6.35mm Male to 3.5mm Female Audio Adapter

- Model No.: FS18100
- 6.35mm (1/4 inch) Male
- 3.5mm (1/8 inch) Female
- 24K gold plated



## 6.35mm Female to 3.5mm Male Audio Adapter

- Model No.: FS18101
- 6.35mm (1/4 inch) female
- 3.5mm (1/8 inch) male
- 24K gold plated



## 2.5mm to 3.5mm Audio Adapter

- FS18105: 2.5mm Male to 3.5mm Female
- FS18106: 3.5mm Male to 2.5mm Female
- 24K gold plated
- Aluminum housing



## 6.35mm male to RCA female Audio Adapter

- Model No.: FS18125
- 6.35mm (1/4 inch) Mono TS Male
- RCA Female
- 24K gold plated



## Banana Plugs for Speaker Wire

- Model No.: FS18140
- 4mm Pin Plug Screw
- Black/Red color coded
- Full copper material
- Solder-free design
- Suitable speaker wire gauge: 12 AWG to 20 AWG Wires
- 24K gold plated connector



## 3.5mm Stereo to 2-RCA Male to Female Audio Splitter

- Model No.: FS1803
- 3.5mm (1/8 inch) male
- Dual RCA female Red/White marked
- 24K gold plated



## HDMI 2.0 / 2.1 Female to Female Panel Mount Cable

- Model No.: FSP1000A-4K/8K
- HDMI Female
- HDMI Female with screw
- #4-40 or M3 screw available
- Support up to 8K@60Hz
- Length: 0.2m; Hole pitch: 25mm



## HDMI 2.0 / 2.1 Male to Female Panel Mount Cable

- Model No.: FSP1001A-4K/8K
- HDMI male
- HDMI Female with screw
- #4-40 or M3 screw available
- Support up to 8K@60Hz
- Length: 0.2m; Hole pitch: 25mm



## HDMI 2.0 / 2.1 Female to Female Panel Mount Cable

- Model No.: FSP1000B-4K/8K
- HDMI Female
- HDMI Female with screw
- M3 screw available
- Support up to 8K@60Hz
- Length: 0.2m; Hole pitch: 29/30mm



## HDMI 2.0 / 2.1 Female to Female Panel Mount Cable

- Model No.: FSP1001B-4K/8K
- HDMI Female
- HDMI Female with screw
- M3 screw available
- Support up to 8K@60Hz
- Length: 0.2m; Hole pitch: 29/30mm



## HDMI 2.0 / 2.1 Flat F/F Panel Mount Cable

- Model No.: FSP1000D-4K/8K
- HDMI Female
- HDMI Female with screw
- #4-40 or M3 screw available
- Support up to 8K@60Hz
- Length: 0.2m; Hole pitch: 25mm



## HDMI 2.0 / 2.1 Flat M/F Panel Mount Cable

- Model No.: FSP1001D-4K/8K
- HDMI Female
- HDMI Female with screw
- #4-40 or M3 screw available
- Support up to 8K@60Hz
- Length: 0.2m; Hole pitch: 25mm



## Mini HDMI male to HDMI female Panel Mount Cable

- Model No.: FSP1002
- Mini HDMI Male
- HDMI Female with screw
- M3 screw available
- Support up to 4K@60Hz
- Length: 0.2m; Hole pitch: 29/30mm



## Micro HDMI male to HDMI female Panel Mount Cable

- Model No.: FSP1003
- Micro HDMI Male
- HDMI Female with screw
- M3 screw available
- Support up to 4K@60Hz
- Length: 0.2m; Hole pitch: 29/30mm



## HDMI male with screw to female extension Cable

- Model No.: FSP1006-4K/8K
- HDMI Male with screw locking
- HDMI Female
- One ferrite core
- M3 screw available
- Support up to 8K@60Hz
- Length: 0.3m;
- Screw center to Connector center pitch: 19.5mm



## HDMI male with screw to DVI female extension Cable

- Model No.: FSP1005
- HDMI Male with screw locking
- DVI24+5 Female
- One ferrite core
- M3 screw available
- Support up to 1080P
- Length: 0.3m;
- Screw center to Connector center pitch: 19.5mm



## DisplayPort Female to Female Panel Mount Cable

- Model No.: FSP1020-4K/8K
- DisplayPort Female
- DisplayPort Female with screw
- #4-40 or M3 screw available
- Support up to 8K@60Hz
- Length: 0.3m; Hole pitch: 27mm



## DisplayPort Female to Female Panel Mount Cable

- Model No.: FSP1021-4K/8K
- DisplayPort Male
- DisplayPort Female with screw
- #4-40 or M3 screw available
- Support up to 8K@60Hz
- Length: 0.3m; Hole pitch: 27mm



## Mini DP Male to DP Female Panel Mount Cable

- Model No.: FSP1024-4K/8K
- Mini DisplayPort Male
- DisplayPort Female with screw
- #4-40 or M3 screw available
- Support up to 8K@60Hz
- Length: 0.3m; Hole pitch: 27mm



## Mini DP Male to Mini DP Female Panel Mount Cable

- Model No.: FSP1024-4K/8K
- Mini DisplayPort Male
- Mini DisplayPort Female with screw
- #4-40 or M3 screw available
- Support up to 8K@60Hz
- Length: 0.3m; Hole pitch: 18mm



## 3.5mm F/F Panel Mount Audio Cable

- Model No.: FSP0001
- 3.5mm Female
- 3.5mm Female with screw
- 26AWG copper
- Length: 0.2m



## 3.5mm M/F Panel Mount Audio extension Cable

- Model No.: FSP0002
- 3.5mm Male
- 3.5mm Female with screw
- 26AWG copper
- Length: 0.2m



## VGA F/F Panel Mount Cable

- Model No.: FSP2040
- VGA Female\*2
- #4-40 or M3 screw available
- Support up to 1080P
- Length: 0.2m



## DVI F/F Panel Mount Cable

- Model No.: FSP2030
- DVI-D Female
- DVI-D Female 45° angled
- #4-40 or M3 screw available
- Support up to 1080P
- Length: 0.2m;



## Panel mount NEMA 5-15P to C13 with screw

- Model No.: FSP2053
- Cable: 3\*18AWG/16AWG/14AWG
- NEMA 5-15P
- C13 with screw
- Input Current/Voltage: 10A/125V
- UL/CE/ROHS certificated
- Length: 1m, 1.8m, 3m, 5m



## IEC C14 to C13 Screws Panel Mount Extension Cable

- Model No.: FSP2054
- Cable: 3\*18AWG/16AWG/14AWG
- C14
- C13 with screw
- Input Current/Voltage: 10A/125V
- UL/CE/ROHS certificated
- Length: 1m, 1.8m, 3m, 5m





## USB4 Panel Mount Extension Cable

- Model No.: FSP2014
- Thunderbolt 3 Male/Female
- #4-40/ M3 screw
- Hole pitch: 25mm
- Support 40Gbps
- Length: 0.3m



## USB-C 3.2 Panel Mount Extension Cable

- Model No.: FSP2001
- USB-C Male/Female with screw
- #4-40 or M30
- Hole Pitch: 25mm or 17mm
- Support 10Gbps
- Length: 0.3m



## USB-C 3.2 Panel Mount Extension Cable, angled

- Model No.: FSP2002
- USB-C Male/Female with screw
- #4-40 or M30
- Hole Pitch: 25mm or 17mm
- Support 10Gbps
- Length: 0.3m



## USB-C 3.1 F/F Panel Mount Cable

- Model No.: FSP2000
- USB-C Female/Female
- #4-40 or M30
- Hole Pitch: 25mm or 17mm
- Support 10Gbps
- Length: 0.3m



PS: Not reviseable

## USB 3.2 C Male to C male cable with screw

- Model No.: FSP2008-A/B/C/D
- USB-C Male to Male with M2 screw
- A: Dual screws; B: Single screw
- C: Up/down angle; D: Right angle
- Support 20Gbps, 4K@60Hz, PD60/100/240W
- Length: 1m 1.8m 3m



## USB 3.2 C Male to C female extension cable with screw

- Model No.: FSP2003-A/B/C/D
- USB-C Male with M2 screw to female
- A: Dual screws; B: Single screw
- C: Up/down angle; D: Right angle
- Support 20Gbps 4K@60Hz, PD60/100/240W
- Length: 0.3m, 0.5m, 1m



## USB 3.0 A Male to C male cable with screw

- Model No.: FSP1081-A/B/C/D
- USB-A Male
- USB C Male with M2 screw
- A: Dual screws; B: Single screw
- C: Up/down angle; D: Right angle
- Support 20Gbps, 4K@60Hz, PD60/100/240W
- Length: 1m 1.8m 3m



## USB Type-E to USB 3.1 Type C female Extension Cable

- Model No.: FSP2012A
- 20-pin USB Type-E A-Key Male
- USB-C Female with screw
- Hole Pitch: 20±0.5mm
- Support 10Gbps 3A current
- Length: 0.3m



## 20P Header to USB 3.1 Type C female Extension Cable

- Model No.: FSP2013
- 20-pin header
- USB-C Female with screw
- Hole Pitch: 20±0.5mm
- Support 10Gbps 3A current
- Length: 0.3m



## USB-C Male to Female Keystone extension Cable

- Model No.: FSP2007
- USB-C Male
- USB-C Female keystone jack
- Keystone: Black, ABS
- Support 10Gbps 4K@60Hz, PD100W
- Length: 0.3m



## USB-C Female to USB 3.0 Male Panel Mount Cable

- Model No.: FSP1080
- USB 3.0 Male
- USB-C Female with M3 screw
- Support 5Gbps/480Mbps
- Length: 0.2m
- Hole Pitch: 25mm



## USB-C Male to USB 3.0 Female Panel Mount Cable

- Model No.: FSP1079
- USB-C Female
- USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 25mm 27mm 30mm



## USB 3.0 M/F Panel Mount Extension Cable

- Model No.: FSP1061
- USB 3.0 Male
- USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## Angle USB 3.0 M/F Panel Mount Extension Cable

- Model No.: FSP1062
- USB 3.0 Male Angle type
- USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## USB 3.0 Female to Female Panel Mount Cable

- Model No.: FSP1060
- USB 3.0 Male
- USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## USB 3.0 BM/AF Panel Mount Extension Cable

- Model No.: FSP1063
- USB 3.0 B Male
- USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## USB 3.0 Micro M/AF Panel Mount Extension Cable

- Model No.: FSP1064
- USB 3.0 Micro Male
- USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## USB Type-E/AF Panel Mount Extension Cable

- Model No.: FSP1065
- 20-pin USB Type-E A-Key Male
- USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## 20P Header/USB 3.0 2\*female Panel Mount Cable

- Model No.: FSP1068
- 20P header Male
- 2\*USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## USB 3.0 2\*male/2\* female Panel Mount Cable

- Model No.: FSP1066
- 2\*USB3.0 Male
- 2\*USB 3.0 Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## USB 3.0 AF/BF Panel Mount Cable

- Model No.: FSP1077
- USB 3.0 B Female with screw
- USB 3.0 A Female with screw
- #4-40 or M3
- Support 5Gbps
- Length: 0.3m;
- Hole Pitch: 25mm 27mm 30mm



## USB 3.0 BM/BF Panel Mount Cable

- Model No.: FSP1075
- USB 3.0 B Male
- USB 3.0 B Female with M3 screw
- Support 5Gbps
- Length: 0.2m
- Hole Pitch: 30mm



## USB 3.0 AM/BM with screw Panel Mount Cable

- Model No.: FSP1073
- USB 3.0 A Male
- USB 3.0 B Male with M3 screw
- Support 5Gbps
- Length: 1m, 1.5m, 3m, 5m
- Hole Pitch: 19mm



## USB 3.0 AM with screw /BM Panel Mount Cable

- Model No.: FSP1072
- USB 3.0 A Male with M3 screw
- USB 3.0 B Male
- Support 5Gbps
- Length: 1m, 1.5m, 3m, 5m
- Hole Pitch: 19mm



## USB 3.0 AM/Micro with screw Panel Mount Cable

- Model No.: FSP1085
- USB 3.0 A Male
- USB 3.0 Micro Male with M3 screw
- Support 5Gbps
- Length: 1m, 1.5m, 3m, 5m
- Hole Pitch: 19mm



## USB 2.0 AM/AF Panel Mount Cable

- Model No.: FSP1032
- USB 2.0 A Male
- USB 2.0 A Female with M3 sc
- Support 480Mbps
- Length: 0.3m
- Hole Pitch: 30mm



## USB 2.0 AF/AF Panel Mount Cable

- Model No.: FSP1030
- USB 2.0 A Female
- USB 2.0 A Female with M3 screw
- Support 480Mbps
- Length: 0.3m
- Hole Pitch: 30mm



## USB 2.0 BM/BF Panel Mount Extension Cable

- Model No.: FSP1042
- USB 2.0 B Male
- USB 2.0 B Female with M3 screw
- Support 480Mbps
- Length: 0.3m
- Hole Pitch: 27mm 30mm



## USB 2.0 CM/BF Panel Mount Extension Cable

- Model No.: FSP1049
- USB 2.0 C Male
- USB 2.0 B Female with M3 screw
- Support 480Mbps
- Length: 0.3m
- Hole Pitch: 27mm 30mm



## USB 2.0 AM/BM Panel Mount Cable

- Model No.: FSP1035
- USB 2.0 A Male
- USB 2.0 B Male with M3 screw
- Support 480Mbps
- Length: 1m, 1.5m, 3m, 5m
- Hole Pitch: 19mm



## Cat5e RJ45 F/F Panel Mount Ethernet Cable

- Model No.: FSP2020
- RJ45 Female
- RJ45 Female with M3 Screw
- Support 10/100/1000M
- Length: 0.2m; Hole pitch: 25mm
- A: CAT5E. B: CAT6



## Cat5e RJ45 F/F Panel Mount Cable, Keystone type

- Model No.: FSP201
- RJ45 Female to Female with M3 Screw
- Keystone inside
- Support 10/100/1000M
- Length: 0.2m;
- Hole pitch: 25mm
- A: CAT6. B: CAT6a C: CAT8



## RJ45 M/F Panel Mount Extension Cable

- Model No.: FSP2022
- RJ45 Male/Female with M3 screw
- Support 10/100/1000M
- Hole pitch: 25mm 27mm
- Length: 0.2m, 0.5m, 1m, 2m, 3m
- A: CAT5E. B: CAT6



## RJ45 M/F Panel Mount Extension Cable, Keyston type

- Model No.: FSP2023
- RJ45 Male/Female with M3 screw
- Keystone inside
- Support 10/100/1000M
- Hole pitch: 25mm
- Length: 0.2m, 0.5m, 1m, 2m, 3m
- A: CAT6. B: CAT6a C: CAT8



## Machine Vision Cable, Gigabit Ethernet Cable

- Model No.: FSP2024A
- CAT6 S/FTP 26AWG
- 5-10 million drag chain cycles
- Flexible shielded cable
- Fit for Basler GigE AVT JAI Dalsa industrial Camera
- Length: 1m/3m/5m/10m
- Waterproof, oil resistance, cold resistance, UV radiation resistance, wear resistance, flame resistance



## Angle Machine Vision Cable, Gigabit Ethernet Cable

- Model No.: FSP2024B
- CAT6 S/FTP 26AWG
- 5-10 million drag chain cycles
- Flexible shielded cable
- Fit for Basler GigE AVT JAI Dalsa industrial Camera
- Length: 1m/3m/5m/10m
- Waterproof, oil resistance, cold resistance, UV radiation resistance, wear resistance, flame resistance



## Industrial profinet RJ45 with screw to M12 cable

- Model No.: FSP2025
- RJ45 male with screw
- M12 4P D code / 8P X code
- IP68 M12 connectors
- 24AWG TC OD:6.6mm
- Flexible shielded cable
- Length: 1m/3m/5m/10m/15m/20m/30m



## Industrial profinet RJ45 male to M12 cable

- Model No.: FSP2025
- RJ45 male M12 4P D code / 8P X code
- IP68 M12 connectors
- 24AWG TC OD:6.6mm
- Flexible shielded cable
- Length: 1m/3m/5m/10m/15m/20m/30m



## CameraLink 26P High Flex Cable

- FSP2070: SDR to SDR
- FSP2071: SDR to HDR
- FSP2072: HDR to HDR
- 5-10 million drag chain cycles
- Flexible shielded cable
- Waterproof, oil resistance, cold resistance, UV radiation resistance, wear resistance, flame resistance
- Length: 1m, 2m, 3m, 5m, 8m, 10m



## 3/4/6/8/12 pin Hirose connector to open IO trigger cable

- Model No.: FSP2074
- Hirose 3/4/6/8/12 pin connector
- Straight/ Elbow connector options
- 5-10 million drag chain cycles
- Flexible shielded cable
- Length: 1m/3m/5m/10m
- Applicable to the product: Basler, Dalsa, Sony, Panasonic, Baumer, Cognex





## HDMI Female to Female Panel mount coupler

- Model No.: FSP3010-4K or 8K
- Gold plated connector
- M3 screw
- Support up to 8K@60Hz
- Hole pitch: 25mm



## Angle HDMI Female to Female Panel mount coupler

- Model No.: FSP3010-4K or 8K
- Gold plated connector
- Angle type
- M3 screw
- Support up to 8K@60Hz
- Hole pitch: 25mm



## DisplayPort Female to Female Panel mount coupler

- Model No.: FSP3020-4K or 8K
- Gold plated connector
- M3 screw
- Support up to 8K@60Hz
- Hole pitch: 27mm



## VGA Panel mount Coupler

- FSP3060: VGA M/F
- FSP3061: VGA F/F
- Nickel plated connector
- M3 screw
- Support up to 1080P



## USB 2.0 AF/BF Panel Mount Coupler

- Model No.: FSP3032
- USB 2.0 A Female
- USB 2.0 B Female with screw
- #4-40 or M30
- Support 480Mbps
- Hole Pitch: 25mm



## Cat5e RJ45 F/F Panel Mount Coupler

- Model No.: FSP3050
- RJ45 Female Female with M3 Screw
- Support 10/100/1000M
- Hole pitch: 25mm
- A: CAT5E. B: CAT6



## USB 3.0 AF/AF Panel Mount Coupler

- Model No.: FSP3040
- 2.0mm female
- 2.0mm female with M3 screw
- Hole pitch: 25.2mm
- Nickel plated



## USB 2.0 AF/AF Panel Mount Coupler

- Model No.: FSP3030
- 2.0mm female
- 2.0mm female with M3 screw
- Hole pitch: 25.2mm
- Nickel plated



## RCA F/F Panel Mount Audio Coupler

- Model No.: FSP3000
- RCA Female
- RCA Female with screw
- #4-40 or M3
- Housing Color: White, Yellow, Red



## 3.5mm F/F Panel Mount Audio Coupler

- Model No.: FSP3001
- 3.5mm Female
- 3.5mm Female with screw
- #4-40 or M3



## Slot bracket 10P to 2\* USB 2.0 A female external

- Model No.: FSP5000
- Internal: USB 10 pin
- External: 2 x USB 2.0 A female
- Pitch: 2.54 mm
- Support 480Mbps
- With slot bracket for installation
- Cable length: 30 cm



## Slot bracket 19P header to 2\*USB 3.0 female

- Model No.: FSP5100
- Internal: 19 pin header
- External: 2 x USB 3.0 A female
- Pitch: 2.0 mm
- Support 5Gbps
- With slot bracket for installation
- Cable length: 50 cm



## Slot bracket USB 3.0 AM to CF

- Model No.: FSP5102
- Internal: USB 3.0 A male
- External: USB 3.0 C female
- Support 5Gbps
- With slot bracket for installation
- Cable length: 30 cm



## Slot bracket 19P header to USB C Female

- Model No.: FSP5109
- Internal: 19pin header
- External: USB 3.2 C female
- Support 10 Gbps
- With slot bracket for installation
- Cable length: 30 cm



## Slot bracket Type-E Key A male to USB C Female

- Model No.: FSP5104
- Internal: Type-E Key A male
- External: USB 3.2 C female
- Support 10 Gbps
- With slot bracket for installation
- Cable length: 30 cm



## Slot bracket USB Male to USB C Female

- Model No.: FSP5103
- Internal: USB 3.2 Gen2 Male
- External: USB 3.2 C female
- Support 10 Gbps
- With slot bracket for installation
- Cable length: 30 cm



## Slot bracket 19P header to Dual USB C Female

- Model No.: FSP5108
- Internal: 19pin header
- External: 2\*USB 3.0 C female
- Support 5Gbps
- With slot bracket for installation
- Cable length: 30 cm



## Slot bracket 19P header to USB C Female

- Model No.: FSP5106
- Internal: 19pin header +Type-E Key A male
- External: USB 3.0 female+USB C femal
- Support 5Gbps+ 10Gbps
- With slot bracket for installation
- Cable length: 30 cm



## Slot bracket Dual SATA male to eSATA female

- Model No.: FSP5301
- Internal: 2\*SATA
- External: 2\* eSATA
- Support 3 Gb/s
- With slot bracket for installation
- Cable length: 45 cm



## Slot bracket Slot Bracket Serial+ Parallel

- Model No.: FSP5204
- Internal: Parallel 25P header female+9 Serial 9P header female
- External: DB25 female+ DB9 male
- With slot bracket for installation
- Cable length: 30 cm



## Dual USB3.0 Flush Mount Cable

- Model No.: FSP4011
- USB 3.0 Male\*2/ Female\*2
- Installation diameter: 32mm
- Support 5Gbps
- Water & Dust Proof
- Length:1m, 2M



## USB3.0 Flush Mount Cable

- Model No.: FSP4010
- USB 3.0 Male/ Female
- Installation diameter: 32mm
- Support 5Gbps
- Water & Dust Proof
- Length:1m, 2M



## USB3.0 AM-AF/CM-CF Flush Mount Cable

- Model No.: FSP4015
- USB 3.0 A+ USB C Male/ Female
- Installation diameter: 32mm
- Support 5Gbps
- Water & Dust Proof
- Length:1m, 2M



## 3.5MM USB3.0 Flush Mount Cable

- Model No.: FSP4012
- 3.5MM + USB 3.0 A Male/ Female
- Installation diameter: 32mm
- Support 5Gbps
- Water & Dust Proof
- Length:1m, 2M



## HDMI 2.0 USB3.0 Flush Mount Cable

- Model No.: FSP4034
- HDMI + USB 3.0 A Male/ Female
- Installation diameter: 32mm
- Support 5Gbps, 4K@60Hz
- Water & Dust Proof
- Length:1m, 2M



## Square USB3.0 Flush Mount Cable

- Model No.: FSP4400
- USB 3.0 Male/ Female
- Installation diameter: 29\*26mm
- Support 5Gbps
- Water & Dust Proof
- Length:1m, 2M



## Square dual USB3.0 Flush Mount Cable

- Model No.: FSP4401
- USB 3.0 Male\*2/ Female\*2
- Installation diameter: 29\*26mm
- Support 5Gbps
- Water & Dust Proof
- Length:1m, 2M



## USB3.0 Flush Mount Cable, smaller size

- Model No.: FSP4301
- USB 3.0 Male/ Female
- Installation diameter: 25mm
- Support 5Gbps
- Water & Dust Proof
- Length:1m, 2M



## USB 3.0 Panel Mount Waterproof Cable

- Model No.: FSP4501
- USB 3.0 Male/ Male
- Support 5Gbps
- Water & Dust Proof
- Length:1m, 2M, 3M



## USB 3.1 Type-C Panel Mount Waterproof Cable

- Model No.: FSP4502
- USB Type-C Male/ Male
- Support 5Gbps, 60W
- Water & Dust Proof
- Length:1m, 2M, 3M



## HDMI 2.0 Panel Mount Waterproof Cable

- Model No.: FSP4503
- HDMI 2.0 Male/ Male
- Support 4K@60Hz
- Water & Dust Proof
- Length:1m, 2M, 3M



## Cat6 U/UTP Waterproof Ethernet Cable

- Model No.: FSP4504
- RJ45 Male/ Male
- Water Proof: IP65
- Pass Fluke channel test
- Length:1m, 2M, 3M



## Round RJ45 IP67 Waterproof Network Connector

- Model No.: FSP4531
- RJ45 Plug
- Water Proof: IP67
- Threaded connection
- Water & Dust Proof



## Aluminum RJ45 IP67 Waterproof Network Connector

- Model No.: FSP4532
- RJ45 Plug
- Water Proof: IP67
- Threaded connection
- Water & Dust Proof
- Suitable for HDTV, Type-C, USB, RJ45



## RJ45 Panel Mount Waterproof Adapter Assembly

- Model No.: FSP4533-M
- Supporting RJ45 waterproof plug
- Water Proof: IP65
- Zinc alloy shell
- Water & Dust Proof
- FSP4533-M: CAT6, FSP4534-M: CAT5



## RJ45 Panel Mount Waterproof Adapter Assembly

- Model No.: FSP4533-F
- Supporting RJ45 waterproof plug
- Water Proof: IP65
- D-type installation
- Waterproof socket
- Multiple tail processing methods
- FSP4533-F: CAT6, FSP4534-F: CAT5



## IP68 Waterproof RJ45 Connector

- Model No.: FSP4560
- RJ45 Plug
- Water Proof: IP68
- PA66 nylon body
- Simply plug in the module
- Water & Dust Proof
- CAT6A, CAT6, CTA5E available



## IP68 SC Simplex Fiber Optic Waterproof Connecto

- Model No.: FSP4564
- SC Single-Mode Plug
- Water Proof: IP68
- PA66 nylon body
- Simply plug in the module
- Water & Dust Proof
- Simplex, Duplex available



## IP67 Waterproof D-Type Through Socket

- Model No.: FSP4524
- Female to Female
- Water Proof: IP67
- Zinc die-cast body
- Nylon PA6BG33 shell
- Water & Dust Proof
- Standard D-type panel mounting holes
- HDTV, Type-C, USB, RJ45, DP available



## Round Type IP67 Waterproof Coupler

- Model No.: FSP4524
- Female to Female
- Water Proof: IP67
- Nylon PA6BG33 shell
- Water & Dust Proof
- Plug and Play
- HDTV, USB, RJ45 available





**HDMI AM/AM Active Optical Cable**

- FSO1000: HDMI 2.0 4K@60HZ
- FSO1001: HDMI 2.1 8K@60HZ
- HDMI Male / Male
- Up to 8K@60Hz, 48Gbps
- Support HDR, HEC, ARC, 3D
- Length: 10M-150M

**Detachable HDMI A-D Active Optical Cable**

- FSO1002: HDMI 2.0 4K@60HZ
- FSO1003: HDMI 2.1 8K@60HZ
- Micro HDMI male to male
- HDMI M to Micro HDMI F adpter
- Up to 8K@60Hz, 48Gbps
- Support HDR, HEC, ARC, 3D
- Length: 10M-100M

**HDMI AM/AM Active Optical Cable with Screw**

- Model No.: FSO1004
- HDMI Male / Male with screw
- Up to 4K@60Hz, 18Gbps
- Support HDR, HEC, ARC, 3D
- Length: 10M-100M

**Armored HDMI AM/AM Active Optical Cable**

- Model No.: FSO10045-4K/8K
- HDMI Male / Male
- Up to 8K@60Hz, 48Gbps
- 200CU stainless steel construction
- Support HDR, HEC, ARC, 3D
- Length: 10M-100M

**DisplayPort M/M Active Optical Cable**

- FSO3000: DP 1.4 8K
- FSO3001: DP 2.1 16K
- DisplayPort Male / Male
- Up to 16K@30Hz, 40Gbps
- Supports HBR3, HDCP 1.4 / 2.2
- Length: 10M-100M

**Armored DisplayPort M/M Active Optical Cable**

- Model No.: FSO3004
- DisplayPort Male / Male
- 200CU stainless steel construction
- Up to 8K@60Hz, 32Gbps
- Supports HBR3, HDCP 1.4 / 2.2
- Length: 10M-100M

**USB3.0 AM/AM Active Optical Cable**

- Model No.: FSO4000
- USB 3.0 Male/Male
- Support 5Gbps
- High Flexibility; Length: 2M-100M

**USB 3.0 AM/AF Hybrid AOC Extension Cable**

- Model No.: FSO4002
- USB 3.0 Male/Female with power port
- Support 5Gbps
- High Flexibility; Length: 2M-50M

**USB 3.1 AM/CM Active Optical Cable**

- Model No.: FSO4007
- USB 3.0 A male/ Type C
- Support 5Gbps
- High Flexibility
- Length: 2M-30M

**USB 3.1 CM/CM Full function Active Optical Cable**

- Model No.: FSO5002
- USB 3.1 C male/ C male
- Support 10Gbps, 4K@60Hz
- High Flexibility
- Length: 2m-30m

**USB 3.1 AM/CM with Screw Active Optical Cable**

- Model No.: FSO4008
- USB 3.0 A male/ Type C male with screw
- Support 10 Gbps
- Compatible with USB2.0/1.1
- Length: 2M-15M

**USB 3.1 AM/Micro M with Screw Active Optical Cable**

- Model No.: FSO4006
- USB 3.0 A male/ Micro USB male with screw
- Support 5Gbps
- Compatible with USB2.0/1.1
- Length: 2M-15M



## SATA III 7P Cable

- FS19002: Straight type
- FS19003: Angle type
- SATA 7PIN\*2
- Built with sturdy metal latch
- Support up to 6Gb Length: 0.3m, 0.5m, 1m



## Ultra thin flexible SATA III 7P Cable

- FS19004: Straight type
- FS19005: Angle type
- SATA 7PIN\*2
- Built with sturdy metal latch
- Ultra slim shield cable OD:0.9\*2.3mm
- Support up to 12Gb
- Length: 0.3m, 0.5m, 1m



## 4/6pcs Set Ultra thin flexible SATA III 7P Cable

- Model No.: FS19006-4s/5s/6s
- SATA 7PIN\*2
- Labeled P1 to P4 P5 P6
- Built with sturdy metal latch
- Ultra slim shield cable OD:0.9\*2.3mm
- Support up to 12Gb
- Length: 0.5m, 1m



## 4x SATA 15P Power Splitter Adapter Cable

- Model No.: FS19037
- 1x SATA Power Plug
- 4x SATA Power Receptacle
- Wire Gauge: 20AWG or 18awg
- Support up to 6Gb transfer rate
- Length: 0.3m, 0.5m, 1m



## SATA Power Cable

- Model No.: FS19041
- SATA 22PIN
- SATA 7PIN+ 4P 5.25"
- Length: to SATA 50CM  
to 5.25" 16CM



## SATA 15P male to 2 15P female Cable

- Model No.: FS19031
- 15PIN male x1
- 15PIN female x2
- Length: 15CM



## SATA 4P/15P M Internal Power Cable

- Model No.: FS19020
- SATA 15 Pin Male
- 5.25" 4 Pin Male
- Length: 15CM



## SATA 4P/15P F Internal Power Cable

- Model No.: FS19020
- SATA 15 Pin Female
- 5.25" 4 Pin Male
- Length: 15CM



## SATA Internal Power Cable

- Model No.: FS19034
- SATA 15-Pin Female
- 5.25" Male
- 5.25" Female
- Length: 30CM



## 4P Internal Power splitter Cable

- Model No.: FS19025
- 5.25" 4P Female x 2
- 5.25" 4P Male x 1
- Length: 20CM




## Fan Splitter Cable

- Model No.: FS19300-1/2/3/4 Ways
- Wire: 24AWG copper
- 4P to 3+1P\*1/2/3/4
- Nylon mesh outside
- Support up to 3Gb transfer rate
- Length: 0.27



## ATX 24 Pin Motherboard PSU Extension Cable

- Model No.: FS19FS19301
- 20+4P male to 24P female
- Wire: 18AWG copper
- Color: Black, White
- Lock connector design
- Length: 0.3m



## 6+2 Pin PCI-E power extension cable

- Model No.: FS19302
- 6+2P male to 6+2P female
- Wire: 18AWG copper
- Color: Black, White
- Lock connector design
- Length: 0.3m



## 4+4 Pin EPS power extension cable

- Model No.: FS19303
- 4+4P male to 4+4P female
- Wire: 18AWG copper
- Color: Black, White
- Lock connector design
- Length: 0.3m



## PSU Cable Extension Kit

- Model No.: FS19304
- 24P M/F\*1; 6+2P M/F\*2
- 4+4P M/F\*1
- Wire: 18AWG copper with braiding
- Color: Black, White, Red, Green, Yellow, Blue, Pink, Grey
- Length: 0.3m




## 12VHPWR PCI-E 12+4P Male to Male Cable

- Model No.: FS19315/FS19315A( angle)
- 12VHPWR male to female
- Wire: 16AWG copper
- Color: Black, White
- Up to 9.5A, 600W
- Durable injection mold
- Length: 0.7m



## 12VHPWR PCI-E 5.0 Extension Cable

- Model No.: FS19316/FS19316A( angle)
- 12VHPWR male to female
- Wire: 16AWG copper
- Color: Black, White
- Up to 9.5A, 600W
- Durable injection mold
- Length: 0.15m, 0.3m



## 12VHPWR 12+4P male to 2/3/4\*8P female splitter cable

- Model No.: FS19317/FS19317A( angle)-2/3/4
- 12VHPWR 16P male to 2/3/4female
- Wire: 16AWG copper
- Color: Black, White
- Up to 9.5A, 600W
- Length: 0.3m



## 12VHPWR 12+4P male to 2/3/4\*8P male splitter cable

- Model No.: FS19318/FS19318A( angle)-2/3/4
- 12VHPWR 16P male to 2/3/4female
- Wire: 16AWG copper
- Color: Black, White
- Up to 9.5A, 600W
- Length: 0.3m



## ATX 24Pin to 20+4Pin Power Supply Cable

- Model No.: FS19310
- 24P male to 20+4P male
- Wire: 18AWG copper
- Color: Black, White
- Length: 0.3m



## 8 Pin to 8Pin CPU Power Cable

- Model No.: FS19312
- 8P male to 8P male
- Wire: 18AWG copper
- Color: Black, White
- Length: 0.55m



## 8 Pin to 4+4 Pin CPU Power Cable

- Model No.: FS19313
- 8P male to 4+4P male
- Wire: 18AWG copper
- Color: Black, White
- Length: 0.55m



## 8 Pin to 6+2 Pin GPU Power Cable

- Model No.: FS19313
- 8P male to 6+2P male
- Wire: 18AWG copper
- Color: Black, White
- Length: 0.55m



## 8 Pin to Dual 6+2 Pin GPU Power Cable

- Model No.: FS19314
- 8P male to dual 6+2P male
- Wire: 18AWG copper
- Color: Black, White
- Length: 0.55m



## PCIE 3.0 X16 Extender Riser

- FS19101: 180 degree
- FS19102: 90 degree
- 30AWG TC Flat cable,
- Gold-plated superb craftsmanship
- High-frequency and low-resistance PCB
- Support: 16GT/s
- Length: 0.2m



## PCIE 4.0 X16 Extender Riser

- FS19103: 180 degree
- FS19104: 90 degree
- 30AWG TC Flat cable,
- Gold-plated superb craftsmanship
- High-frequency and low-resistance PCB
- Support: 32GT/s
- Length: 0.2m




## PCIE 5.0 X16 Extender Riser

- FS19105: 180 degree
- FS19106: 90 degree
- 30AWG TC Flat cable,
- Gold-plated superb craftsmanship
- High-frequency and low-resistance PCB
- Support: 64GT/s
- Length: 0.2m



## M.2 NVMe /WiFi/ Mini PCI-E Extension Cable

- FS19123: M.2 NVMe Extension Cable
- FS19124: M.2 WiFi Extension Cable
- FS19125: Mini PCE-E Extension Cable
- X1, X4, X16 available
- Gold-plated superb craftsmanship
- High-frequency and low-resistance PCB
- Length: 3 ~ 100 cm



## PCI-E 3.0 X1 to X4 Extension Cable

- Model No.: FS19121
- PCI-E 1X to 4X
- Don't block the graphics card fan
- USB 3.0 AM-AM Cable
- 90°/180° available
- Length: 0.3m 0.6m



## NGFF M.2 to PCI-E X4 Riser Adapter

- Model No.: FS19122
- M.2 NGFF to PCI-E X4
- Gold-plated superb craftsmanship
- High-frequency and low-resistance PCB
- With 4PIN or SATA 15P power cable
- Length: 0.2





## Internal Mini SAS SFF-8087 to SFF-8087 Cable

- Model No.: FSH0001
- SFF-8087 36P with latch\*2
- Durable PET Woven Mesh
- SAS 2.1 Compliant 6Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m
- Angle type available



## Internal Mini SAS HD SFF-8087 to SFF-8643 Cable

- FSH0002: 8087-8643
- FSH0003: 8643-8643
- Durable PET Woven Mesh
- SAS 3.0 Compliant 12Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m
- Angle type available



## Mini SAS HD SFF-8611 to SFF-8611 oCulink Cable

- Model No.: FSH0004
- SFF-8611 with latch\*2
- Durable PET Woven Mesh
- Support up to 16 Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m



## Internal Mini SAS HD SFF-8087 to SFF-8611 Cable

- Model No.: FSH0005
- SFF-8087 with latch
- SFF-8611 with latch
- Durable PET Woven Mesh
- Support 12 Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m



## Internal Mini SAS HD SFF-8643 to SFF-80611 Cable

- Model No.: FSH0006
- SFF-8643 with latch
- SFF-8611 with latch
- Durable PET Woven Mesh
- Support SAS 3.0 12 Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m



## Slim SAS 38P SFF-8654 to SFF-8654 Cable

- Model No.: FSH0001
- SFF-8654 with latch
- SFF-8654 with latch
- Durable PET Woven Mesh
- Support SAS 4.0, 24 Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m



## Mini SAS HD 8088 to SFF-8644 Cable

- FSH0008: 8088-8088 (6G)
- FSH0009: 8088-8644 (6G)
- FSH0010: 8644-8644(12G)
- Durable & Flexible cable
- SAS 2.1/3.0 Compliant 6/12Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m, 2m



## MiniSAS HD Breakout to 4xSATA 7P Cable

- FSH0021: 8087-4\*SATA 7P
- FSH0022: 8643-4\*SATA 7P
- FSH0023: 8654-4\*SATA 7P
- Durable PET Woven Mesh
- Super thin SATA cable
- Support 6Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m



## MiniSAS HD Breakout to 4xSFF-8482 29P+15P Cable

- FSH0024: 8087-4\*SFF-8482
- FSH0025: 8643-4\*SFF-8482
- FSH0026: 8654-4\*SFF-8482
- Durable PET Woven Mesh
- Super thin SATA cable
- Support 12Gbps
- Impedance: 100 Ohms
- Length: 0.5m, 1m



## Mini SAS SFF-8643 to U.2 SFF-8639 Cable

- FSH0031: 8011-SFF-8639
- FSH0032: 8643-SFF-8639
- FSH0033: 8654-SFF-8639
- Durable & Flexible cable
- Impedance: 85 Ohms
- Integrated SATA 15P power
- Support SAS 3.0 12 Gbps
- Length: 0.5m, 1m



## 10G SFP DAC Copper Cable

- Model No.: FSH1002
- Connector: SFP
- Cable: 30-24AWG copper
- Support 10G
- Compatible with Huawei, H3C, Ruijie, Juniper, Cisco, TP-Link, D-Link, Dell, etc.
- Length: 0.5m, 1m, 2m, 3m, 5m



## 25G SFP28 DAC Copper Cable

- Model No.: FSH1003
- Connector: SFP28
- Cable: 30-26AWG copper
- Support 25G
- Compatible with Huawei, H3C, Ruijie, Juniper, Cisco, TP-Link, D-Link, Dell, etc.
- Length: 0.5m, 1m, 2m, 3m, 5m



## 40G QSFP+ DAC Copper Cable

- Model No.: FSH1004
- Connector: QSFP+
- Cable: 30-26AWG copper
- Support 40G
- Compatible with Huawei, H3C, Ruijie, Juniper, Cisco, TP-Link, D-Link, Dell, etc.
- Length: 0.5m, 1m, 2m, 3m, 5m



## 50G SFP56 DAC Copper Cable

- Model No.: FSH1005
- Connector: SFP56
- Cable: 30-26AWG copper
- Support 50G
- Compatible Cisco QSFP-100G-CU2M
- Length: 0.5m, 1m, 2m, 3m, 5m



## 100G QSFP28 DAC Copper Cable

- Model No.: FSH1006
- Connector: QSFP28
- Cable: 30-26AWG copper
- Support 100G
- Compatible with Huawei, H3C, Ruijie, Juniper, Cisco, TP-Link, D-Link, Dell, etc.
- Length: 0.5m, 1m, 2m, 3m, 5m



## 200G OSFP DAC Copper Cable

- Model No.: FSH1007
- Connector: QSFP56
- Cable: 30-26AWG copper
- Support 200G
- Compatible with Huawei, H3C, Ruijie, Juniper, Cisco, TP-Link, D-Link, Dell, etc.
- Length: 0.5m, 1m, 2m, 3m



## 400G QSFP-DD DAC Copper Cable

- Model No.: FSH1008
- Connector: QSFP-DD
- Cable: 30-26AWG copper
- Support 400G
- Compatible with Huawei, H3C, Ruijie, Juniper, Cisco, TP-Link, D-Link, Dell, etc.
- Length: 0.5m, 1m, 2m, 3m



## 400G QSFP-DD to 2/4/8 X 200G QSFP56 Breakout Cable

- Model No.: FSH1021-2X or 4X or 8X
- Connector: QSFP-DD/QSFP56
- Cable: 30-26AWG copper
- Support 400G to 2\*200G or 400G to 4\*100G
- Length: 0.5m, 1m, 2m, 3m



## 10/25/40/50/100/200/400/800G Active Optical Cable

- Model No.: FSH1101-\*\*G
- Cable: OM3/OM4
- Connector: Accordingly
- Low Power Consumption
- Length: 1m-100m



## 400G AOC QSFP-DD to 2/4/8 X 200G QSFP56 Breakout


- Model No.: FSH1221-2X or 4X or 8X
- Connector: QSFP-DD/QSFP56
- Cable: OM4
- Support 400G to 2\*200G or 400G to 4\*100G
- Length: 1m-100m






## Advanced Testing Equipment

Fluke Tester

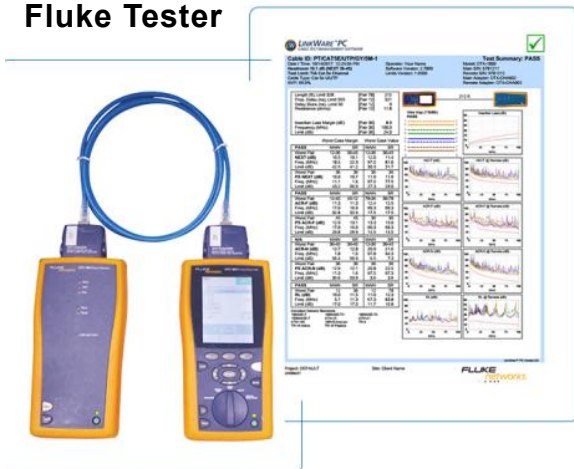

Network Analyzer

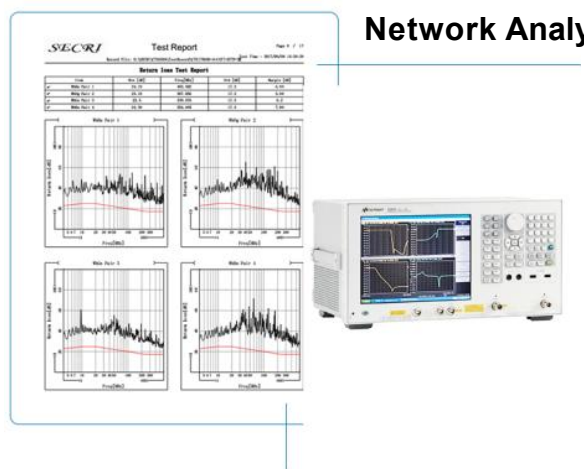

## Advanced production line




**CAT8 S/FTP Bulk Ethernet Installation Cable**


- Model No.: FS17011
- CA8 S/FTP
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 22AWG 0.64mm Copper
- 40GBase-T@2000MHz
- Length: 100m, 305m, 500m

**CAT7 S/FTP Bulk Ethernet Installation Cable**

- Model No.: FS17008
- Model No.: FS17009 Duplex
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 23AWG 0.57mm Copper
- 600MHz
- Length: 100m, 305m, 500m

**CAT6A S/FTP Bulk Ethernet Installation Cable**

- Model No.: FS17007
- CA6A S/FTP
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 23AWG 0.57mm Copper
- 500MHz
- Length: 100m, 305m, 500m

**CAT6A F/FTP Bulk Ethernet Installation Cable**


- Model No.: FS17007
- CA6A S/FTP
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 23AWG 0.57mm Copper
- 500MHz
- Length: 100m, 305m, 500m

**CAT6A U/UTP Bulk Ethernet Installation Cable**

- Model No.: FS17006
- CA6A U/UTP
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- Internal Longitudinal Striations (ILS)
- 23AWG 0.57mm Copper
- 500MHz
- Length: 100m, 305m, 500m

**CAT6 S/FTP Bulk Ethernet Installation Cable**

- Model No.: FS17005
- CA6 S/FTP
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 23AWG 0.57mm Copper
- 250MHz
- Length: 100m, 305m, 500m

**CAT6 F/UTP Bulk Ethernet Installation Cable**

- Model No.: FS17004
- CA6 F/UTP,
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 23AWG 0.57mm Copper
- 250MHz
- Length: 100m, 305m, 500m

**CAT6 U/UTP Bulk Ethernet Installation Cable**

- Model No.: FS17003
- CA6 U/UTP
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 23AWG 0.57mm Copper
- 250MHz
- Length: 100m, 305m, 500m

**CAT5E F/UTP Bulk Ethernet Installation Cable**

- Model No.: FS17002
- CA5E F/UTP
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 24AWG 0.50mm Copper
- 100MHz
- Length: 100m, 305m, 500m

**CAT5E U/UTP Bulk Ethernet Installation Cable**

- Model No.: FS17001
- CAT5E U/UTP
- Jacket: PVC/PE/LSZH/CM/CMR/CMP
- 24AWG 0.50mm Copper
- 100MHz
- Length: 100m, 305m, 500m







## 75Ω Coaxial Cable

- ◆ Type: RG59, RG6, RG11 3C2V, KX6, KX8
- ◆ Conductor: CU, CCS
- ◆ Insulation: FPE
- ◆ Shielding: Dual Shield, Quad Shield
- ◆ Jacket: PVC, PE, LSZH, PU
- ◆ Temperature range: -20C° ~ +80C°
- ◆ Reference standard: ANSI/SCTE74
- ◆ Suitable for CCTV signal transmission, satellite TV signal reception and transmission, high-frequency equipment connection and internal Wiring, transmission wires, etc.etc



## 75Ω Coaxial Trunk Distribution Cable

- ◆ Type: QR500, QR500 with Messenger, QR500, QR500 with Messenger,
- ◆ Inner Conductor: CU, CCA
- ◆ Outer Conductor: Aluminum Tube
- ◆ Insulation: FPE
- ◆ Shielding: Dual Shield, Quad Shield
- ◆ Jacket: PE
- ◆ Temperature range: -20C° ~ +80C°
- ◆ Reference standard: EN50117
- ◆ Suitable for CCTV signal transmission, satellite TV signal reception and transmission, high-frequency equipment connection and internal Wiring, transmission wires, etc.etc



## 50Ω Coaxial Cable

- ◆ Type: RG8, RG58, RG213, LMR100/195/200/240/300/400/600
- ◆ Conductor: CU, CCS
- ◆ Insulation: FPE
- ◆ Shielding: Dual Shield, Quad Shield
- ◆ Jacket: PVC, PE, LSZH, PU
- ◆ Temperature range: -20C° ~ +80C°
- ◆ Reference standard: MIL-C-17, UL1354
- ◆ Engineered for critical application in the high signal sequences of wireless and datacommunication system where low attenuation required, used in most Radio Frequency and Microwave Transmission, LAN, computer and instrumentation/control applications.

## Flat Speaker Wire



- ◆ Rated voltage: 300V
- ◆ Conductor: CU Stranded or solid
- ◆ Wire Gauge: 10-28AWG
- ◆ Jacket: PVC, LSZH
- ◆ Temperature range: -15° ~ +70C°
- ◆ Reference standard: UL Subject 758,UL1581
- ◆ Ideal for home theater applications,
- ◆ Fixed installation in building technology
- ◆ Suitable for concealed installation under carpets or behind skirting boards




## Round Speker cable, 2C/4C

- ◆ Rated voltage: 450/750V
- ◆ Conductor: CU, CCA Stranded or solid
- ◆ Wire Gauge: 20/18/16/14/12/10AWG
- ◆ Core Identification: Red Black
- ◆ Core numbers: 2C, 4C
- ◆ Jacket: PVC, LSZH
- ◆ Temperature range: -15° ~ +70C°
- ◆ Color: White, Black
- ◆ Length: 100m/Roll
- ◆ Certificate: UL, CE, CPR ECA
- ◆ Perfect for in-Wall Installation
- ◆ Fixed installation in building technology




## Parallel Speaker cable, Clear, Black/Red

- ◆ Rated voltage: 300/500V
- ◆ Conductor: CU, CCA Stranded or solid
- ◆ Wire Gauge: 20/18/16/14/12/10AWG
- ◆ Clear with a Red polarity stripe
- ◆ Core numbers: 2C
- ◆ Jacket: PVC, LSZH
- ◆ Temperature range: -15° ~ +70C°
- ◆ Color: Clear type, Black/Red type
- ◆ Length: 100m/Roll
- ◆ Certificate: UL, CE, CPR ECA
- ◆ Connects audio speakers to an A/V receiver or amplifier
- ◆ Recyclable Spool for Easy Dispensing and Storage

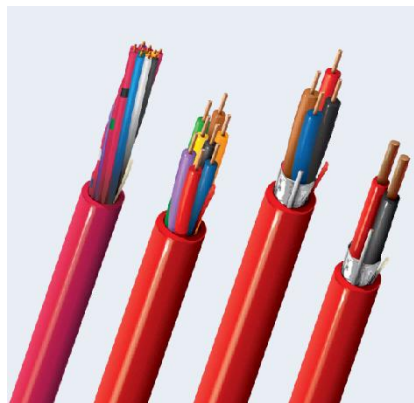

## Fire Alarm Cable

- ◆ Rated voltage: 300V
- ◆ Type: FPL, FPLR, FPLP
- ◆ Conductor: Stranded or solid BC or TC
- ◆ Wire gauge: 18/16/14/12AWG, 2C or 4C
- ◆ Insulation: Flame-retardant PVC/PE
- ◆ Shielding: Unshield or Drain wire + Aluminum foil shield
- ◆ Jacket: PVC, LSZH
- ◆ Reference standard: UL1424/EC60332-1-2/EN50200/BS6387

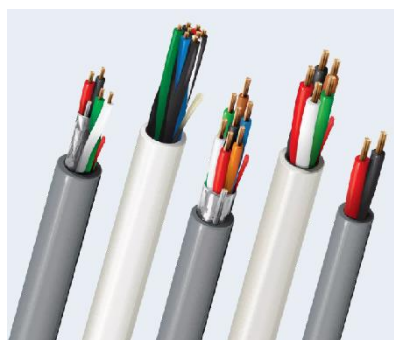

## Burglar Alarm Cable

- ◆ Rated voltage: 300V
- ◆ Conductor: Stranded BC or CCA
- ◆ Wire gauge: Signal wire 0,22mm<sup>2</sup>, Feeding wire 0,50mm<sup>2</sup> or 0.75mm<sup>2</sup>
- ◆ Cord number: 2C, 4C, 6C, 8C, 10C, 12C...
- ◆ Insulation: PVC/PP/HDPE
- ◆ Shielding: Unshield or Drain wire + Aluminum foil shield
- ◆ Jacket: PVC, LSZH
- ◆ Reference standard: EC 60228 / CEI 20-11 / EN 50363 / CEI UNEL 36762



## Lutron Cable

- ◆ Conductor: Stranded BC
- ◆ Wire gauge: 22/2C SH+18/2C
- ◆ Stripe: Red, Blue, Purple, Brown, Yellow, Green
- ◆ Insulation: PE/Plenum PVC-Low Smoke
- ◆ Shielding: Drain wire + Aluminum foil shield
- ◆ Jacket: PVC(CM,CMR, CMP)
- ◆ Certificate: UL




## Thermostat cable

- ◆ Rated voltage: 150V
- ◆ Conductor: Solid BC
- ◆ Wire gauge: 18AWG, 20AWG
- ◆ Cord number: 2C 3C 4C 5C 6C 7C 8C
- ◆ Insulation/Jacket: PVC
- ◆ Temperature range: -15°~ +60C°
- ◆ Reference standard: UL Standard 13. Power Limited Circuit Cable
- ◆ Heating & air Conditioning Equipment, doorbells and Other Indoor/Outdoor Low Voltage Applications Use



## PV Cable, Solar cable

- ◆ Type: H1Z2Z2-K UL4703, PV1-F
- ◆ Conductor: Tinned annealed copper
- ◆ Conductor size: 1.5/2.5/4/6/10/16/25mm<sup>2</sup> or 18/16/14/12/10/8AWG.....
- ◆ Rated voltage: AC 600V/1000V/2000V
- ◆ Insulation: XLPE
- ◆ Jacket: UV resistant, cross linkable, halogen free, flame retardant
- ◆ Temperature range: -40° C-90° C
- ◆ Reference standard: IEC 62930 "2017, BS EN 50618:2014, 2Pfg1169/08:2007 UL4703
- ◆ Used to connect the various components of a solar power system, such as solar panels, charge controllers, inverters, and batteries.



## Battery Cable, Red/Black

- ◆ Max Voltage: 600V
- ◆ Conductor: CU or CCA
- ◆ Wire Gauge: 1.5/2.5/4.0/6.0/10/16/25/35/50/70/95mm<sup>2</sup> or 2/0, 1/0, 1, 2, 4, 6,8,10, 12, 14, 16 18AWG
- ◆ Jacket: PVC, LSZH
- ◆ Temperature range: -50°C-105°C
- ◆ Reference standard: BS EN 6022, UL1426

## General Power Cable


- ◆ Rated Voltage: 300/300V, 300/500V 450/750V
- ◆ Type: H05V-K, H07V-K, H03VV-F, H05VV-F, H03VVH2-F, Twin & Earth CYKY-J, VYKY-O, CYKYLo...
- ◆ Conductor: CU
- ◆ Wire Gauge: 0.5/0.75/1.5/2.5/4.0/6.0/10/16/25/35/50/70/95/120/150/185/240mm<sup>2</sup> or 2/0, 1/0, 1, 2, 4, 6,8,10, 12, 14, 16 18AWG

Core number: 2/3/4/5/7/\*\*/ Cors

- ◆ Insulation/Jacket options: PVC, XLPE, Rubber, Silicone
- ◆ Temperature range: 5° C to +70° C
- ◆ Reference standard: EN 50525-2-3, EN 50265, EN 50363, BS 6004, IEC 60332-1





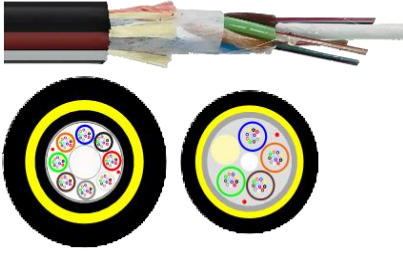


## ADSS Cable

- ◆ Type: Central Tube ADSS, Layer Stranded ADSS, Dielectric Armored ADSS
- ◆ Fiber Type: Single-mode (G.652.D/G.657.A1) / Multimode (OM1-OM5)
- ◆ Strength Member: FRP (Fiber Reinforced Plastic) rods
- ◆ Jacket Material: UV-resistant HDPE (High-Density Polyethylene)
- ◆ Max Span: 100–400 meters (depends on sag and tension)
- ◆ Tensile Strength: 10–30 kN (installation)
- ◆ Crush Resistance:  $\geq 2500$  N/10 cm
- ◆ Bend Radius: 15×OD (installation), 20×OD (long-term)
- ◆ Temperature Range: -40°C to +70°C
- ◆ UV Resistance: IEC 60794-1-2 compliant
- ◆ Standards: IEEE 1138, IEC 60794, RoHS




## FTTH Drop Cable

- ◆ Structure: Single-mode, simplex/duplex
- ◆ Fiber Type: G.657.A1/B1.3
- ◆ Fiber Count: 1/2
- ◆ Jacket Material: LSZH (Low Smoke Zero Halogen)
- ◆ Outer Diameter: 2.0–6.0 mm
- ◆ Tensile Strength: 600–1000 N (installation), 200–300 N (operational)
- ◆ Bend Radius: 10×OD (installation), 15×OD (long-term)
- ◆ Temperature Range: -40°C to +70°C
- ◆ Standards: ITU-T, IEC, RoHS/REACH compliant
- ◆ Aramid Yarn Reinforcement: Optional

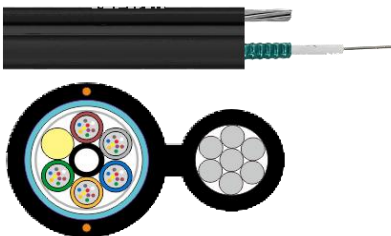


## Aerial Installation

- ◆ Type: ADSS, Figure-8 Cable, OPGW (Optical Ground Wire)
- ◆ Fiber Type: Single-mode (G.652.D) / Multimode (OM1-OM5)
- ◆ Strength Member: Aramid yarn, FRP (Fiber Reinforced Plastic), or steel messenger
- ◆ Jacket Material: UV-resistant HDPE or LSZH
- ◆ Max Span: 50–200 meters (varies by design)
- ◆ Tensile Strength: 500–3000 N (installation)
- ◆ Temperature Range: -40°C to +70°C
- ◆ Crush Resistance:  $\geq 2000$  N/10 cm
- ◆ UV Resistance: IEC 60794-1-2 compliant
- ◆ Standards: IEEE 1138, IEC 60794, RoHS
- ◆ Optional Features: Lightning protection, Anti-bird damage coating, Pre-attached suspension hooks

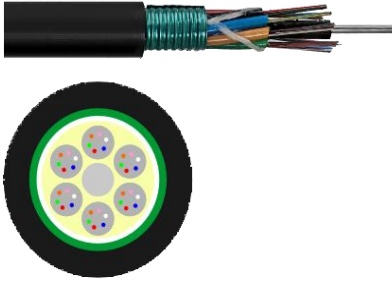


## Duct Installation

- ◆ Type: Loose Tube Cable, Micro Duct Cable, Armored Cable
- ◆ Fiber Type: Single-mode (G.652.D/G.657.A1) / Multimode (OM1-OM5)
- ◆ Structure: Central loose tube or stranded loose tubes
- ◆ Jacket Material: HDPE (High-Density Polyethylene) or LSZH
- ◆ Crush Resistance:  $\geq 3000$  N/10 cm
- ◆ Temperature Range:  $-30^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- ◆ Tensile Strength: 600–1500 N (installation)
- ◆ Bend Radius:  $10 \times \text{OD}$  (installation),  $15 \times \text{OD}$  (long-term)
- ◆ Water Resistance: Water-blocking tape/gel-filled tubes
- ◆ Standards: IEC 60794, ISO 11801, RoHS
- ◆ Optional Features: Flame-retardant jacket (IEC 60332 compliant), Pre-terminated ends (connectorized), Rodent-resistant armor

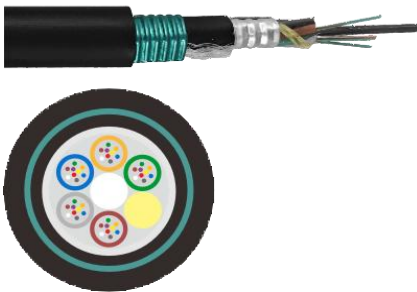

## Direct Buried

- ◆ Type: Armored Cable, Double Jacket Cable, Ribbon Cable
- ◆ Armor Type: Steel tape, aluminum tape, or corrugated metal
- ◆ Jacket Material: HDPE, LSZH, or polyethylene with UV stabilizers
- ◆ Crush Resistance:  $\geq 4000$  N/10 cm
- ◆ Tensile Strength: 1000–3000 N (installation)
- ◆ Temperature Range:  $-40^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$
- ◆ Water Resistance: Gel-filled tubes/water-blocking powder
- ◆ Impact Resistance: ASTM D2444 compliant
- ◆ Rodent Resistance: Metal armor/glass yarn reinforcement
- ◆ Bend Radius:  $15 \times \text{OD}$  (installation),  $20 \times \text{OD}$  (long-term)
- ◆ Standards: IEC 60794-1-2, IEEE 1556, RoHS
- ◆ Optional Features: Lightning protection layer, Anti-termite coating, Pre-spliced fiber tails

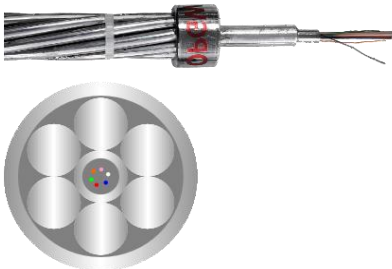

## OPGW Cable Optical

- ◆ Type: Central Tube OPGW, Stranded Loose Tube OPGW, Aluminum-Clad Steel (ACS) OPGW
- ◆ Fiber Type: Single-mode (G.652.D/G.655) / Multimode (OM1-OM4)
- ◆ Conductor Material: Aluminum-clad steel, aluminum alloy
- ◆ Fiber Count: 12–144 fibers
- ◆ Short-Circuit Capacity: 10–60 kA<sup>2</sup>s (varies by design)
- ◆ Tensile Strength: 20–100 kN (depends on ACS ratio)
- ◆ Diameter: 10–20 mm (typical)
- ◆ Temperature Range:  $-40^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$
- ◆ DC Resistance:  $\leq 0.5$   $\Omega/\text{km}$  (electrical performance)
- ◆ Optical Attenuation:  $\leq 0.22$  dB/km @1310/1550 nm
- ◆ Standards: IEEE 1138, IEC 60794, CIGRE TB 234

Bulk Cable Packaging



Easy Box



Wooden Spool



Plastic Spool



PE Film Wrap

Cable Assembly Packaging



Polybag



OPP Bag



Zip Bag



Bag With Hang Card



Hang Card



Color Box 1



Color Box 2



Color Box 3



Color Box 4



Blister 1



Blister 2



Blister 3



Blister 4

## 1. What is your MOQ for your products ?

- ✓ Farsince offers small MOQ, If No OEM need, MOQ for bulk cable is 50 Rolls, 500 pieces for cables with Connector.
- ✓ If your request OEM packing, MOQ for bulk cable is 200 roll, for Cable with connector is totally 3000 meters per color.

## 2. What is your lead time ?

- ✓ Normally 7-35 days after order details confirmed and received your deposit
- ✓ We are able to do priority for top urgent order, 1-2 weeks depends on quality and Specification

## 3. What is your payment term?

- ✓ Our payment are Flexible including T/T, L/C or O/A.
- ✓ For beginning deals, we request 30% deposit and 70% before shipment. We will consider to offer credit through clients establishing a certain degree of credibility.
- ✓ All products are inspected by us or a third party. We guarantee a full refund to clients if Ethernet cables are not approved


## 4. What is your quality policy?

We strive to delivery high-quality Cabling products and to be a reliable supplier

- ✓ The raw material will be inspected by our incoming QC
- ✓ Input Process Quality Control (IPQC)
- ✓ Outgoing Quality Control (OQC)
- ✓ 5 Years Warranty
- ✓ In Case of any defective happens, we will analyze the real reason and make the improvement to avoid problems happen again. we will take responsibility for any of our mistake: make replacement or refund.



 **FARSINCE**

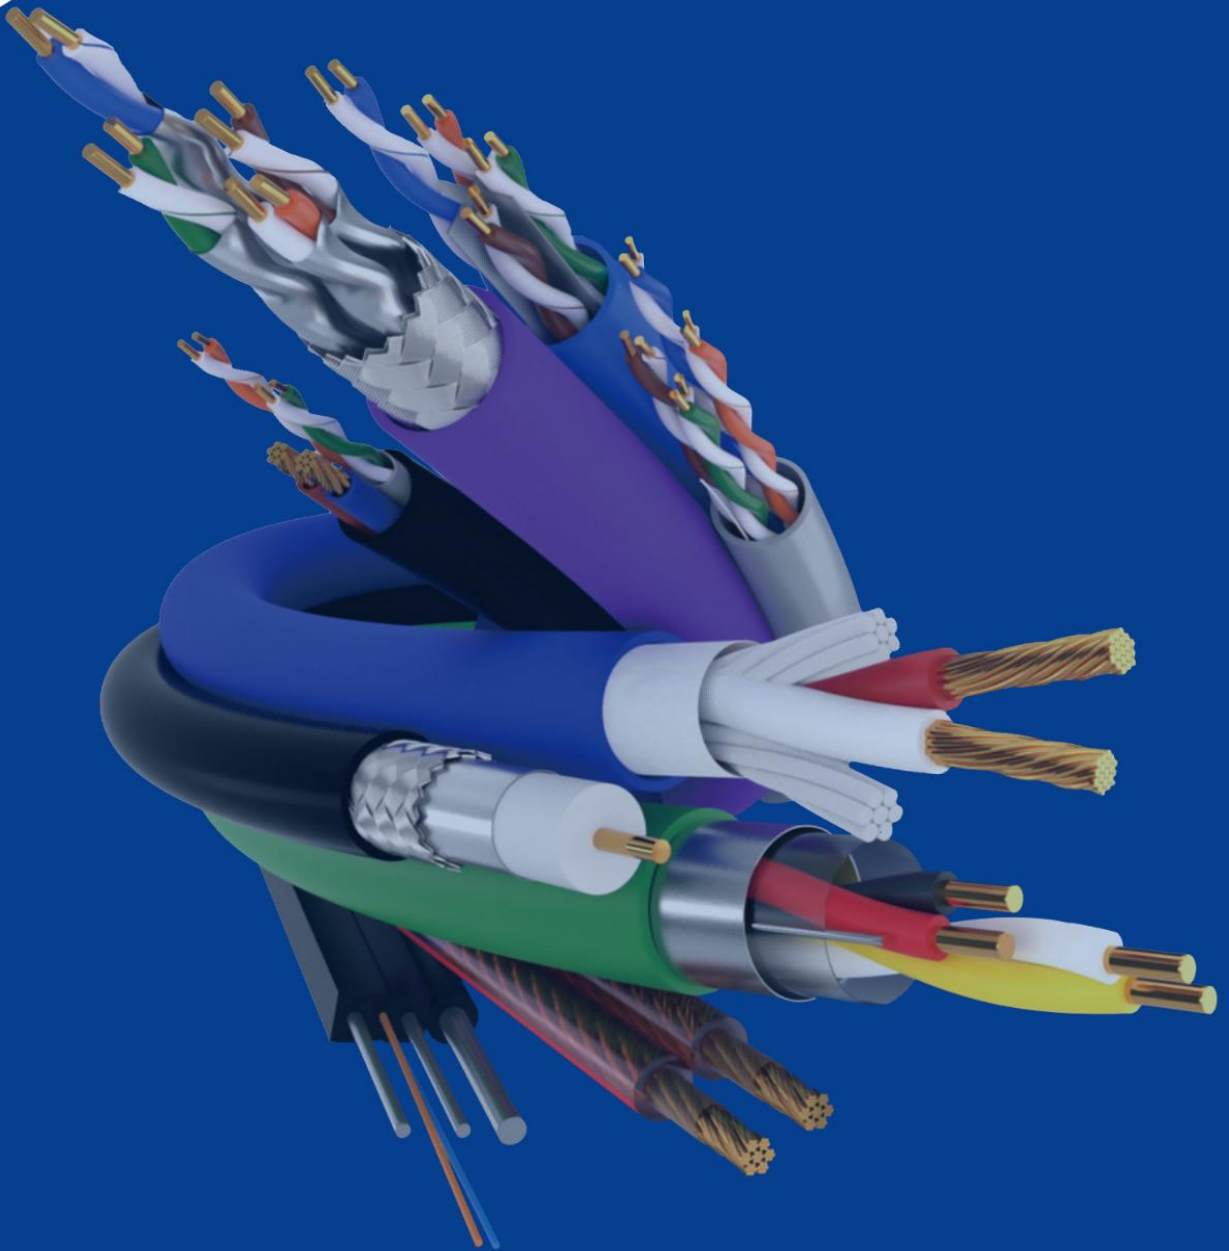

[farsince.com](http://farsince.com) | [sales@farsince.com](mailto:sales@farsince.com) | +86 57487042335